


Code: 7G21SS1USBPB-B
Hartland G2 | HARTLAND G2 RANGE | USB Power Sockets

Product Image




Wiring

Wiring 13Amp Switched Single
Sockets with USB Charging Outlet
— Neutral — Earth — Live

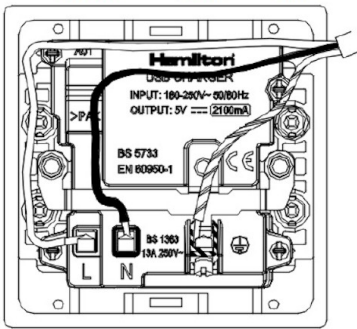

Dimensions

Hamilton®
HARTLAND G2
SS1USBX1
USB Charger + Switched Socket

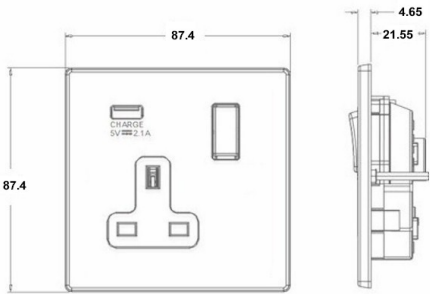

Insert Type	1 gang 13A Single Pole Switched Socket with 1 USB Outlet 1x2.1A
Insert Colour	Polished Brass/Black
EAN13 Barcode	5051164026363
Commodity Code	85363010
Luckins TSI	423821442
ETIM Class	EC000125
Dimensions(Nominal)	Single: Height = 87.4mm Width = 87.4mm Depth = 4.65mm
Fixing Hole Centres	Box Fixing = 60.3mm
Minimum Wall Box Depth	25mm
Switched Poles	Single
Current Rating	13 Amp, USB 1 x 2.1A
Voltage	180/250V AC, USB = 5V
Maximum Load	13 Amp, USB = 2.1A
Mains Frequency	50/60Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	3x2.5mm ²
Terminal Capacity 2	3x4mm ²
Terminal Capacity 3	2x6mm ² Multi-Strand
Earth Terminal Capacity 1	3x2.5mm ²
Earth Terminal Capacity 2	3x4mm ²
Earth Terminal Capacity 3	2x6mm ² Multi-Strand
Product Class 1	Must be earthed
Ambient Operating Temperature	-15°C to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS1363 BS EN 62368
Patents And Trade Marks	Hartland G2 is a Registered Trade Mark No UK00003388376