

Code: 742XLEDITB100

Hartland | HARTLAND RANGE | LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmers


Product Image



Wiring



Dimensions

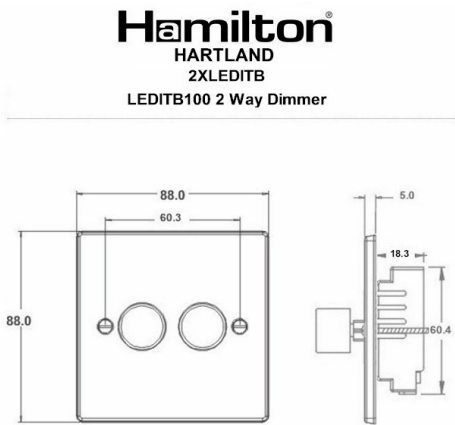

Insert Type	2 gang 100W LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmer
Insert Colour	Satin Steel
EAN13 Barcode	5017504079314
Commodity Code	85365015
Luckins TSI	403373648
ETIM Class	EC000025
Dimensions(Nominal)	Single: Height = 88.0mm Width = 88.0mm Depth = 5.0mm
Weight	155 GR
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = N/A
Minimum Wall Box Depth	35mm
Switched Poles	Single
Current Rating	0.3A Per Gang
Voltage	230V AC
Maximum Load	5-70W Per Gang
Mains Frequency	50Hz
IP Rating	IP2XD
Terminal Capacity 1	2X1mm²
Terminal Capacity 2	2X1.5mm²
Earth Terminal Capacity 1	5x1mm²
Earth Terminal Capacity 2	4X1.5mm²
Earth Terminal Capacity 3	3X2.5mm²
Earth Terminal Capacity 4	1X4mm² Multi-Strand
Earth Terminal Capacity 5	1X6mm²
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5°C to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN 60669-2-1
Additional Notes	Trailing Edge & Leading Edge Dimmer

Code: 742XLEDITB100

Hartland | HARTLAND RANGE | LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmers

Patents And Trade Marks

Hartland is a Registered Trade Mark No. 2344778

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | **W:** www.hamilton-litestat.com

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 18/05/2024 E&OE