


Code: LRX1XTMAB-ABB

Linea-Rondo CFX | LINEA-RONDO CFX RANGE | Resistive/Inductive Trailing Edge Touch Master Multi-Way Dimmers

Product Image




Wiring

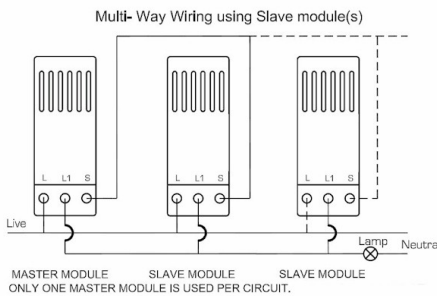

Dimensions

Hamilton®
LINEA RONDO CFX
1XTM

Resistive/Inductive Trailing Edge Touch Master
Multi-Way Dimmer

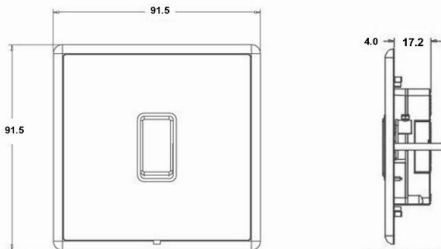

Insert Type

1 gang 250W/210VA Resistive/Inductive Trailing Edge Touch Master Multi-Way Dimmer

Insert Colour

Antique Brass/Black

EAN13 Barcode

5017504481131

Commodity Code

85363010

Luckins TSI

391672312

Dimensions(Nominal)

Single: Height = 91.5mm Width = 91.5mm Depth = 4.0mm

Switched Poles

N/A

Current Rating

1.1 Amp

Voltage

220/250V AC

Maximum Load

250W Resistive 210VA Inductive Min Load 25W/25VA

Mains Frequency

50Hz

IP Rating

IP2XD

Contact Gap Minimum

N/A

Terminal Capacity 1

2x1mm²

Terminal Capacity 2

2x1.5mm²

Earth Terminal Capacity 1

5x1mm²

Earth Terminal Capacity 2

4 x 1.5mm²

Earth Terminal Capacity 3

3 x 2.5mm²

Earth Terminal Capacity 4

1 x 4mm² Multi-strand

Earth Terminal Capacity 5

1 x 6mm²

Product Class 1

Face plate must be earthed

Ambient Operating Temperature

-5° to +40°C

Recommended Location

Internal Use Only

Maximum Installation Altitude

2000m

Standard/Approval

BS EN 60669-2-1

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | W: www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 12/1/2022 11:59:09 PM E&OE

Code: LRX1XTMAB-ABB

Linea-Rondo CFX | LINEA-RONDO CFX RANGE | Resistive/Inductive Trailing Edge Touch Master Multi-Way Dimmers

Additional Notes

TRAILING EDGE TECHNOLOGY DIMMERS. Are suitable for control of both resistive and inductive loads. When used for dimming low voltage electronic halogen transformers it must be noted that the dimmer controls the primary side of the transformer. Tungsten filament GU10 lamps must be branded with a fuse base. When using mains voltage halogen lamps-dimmers should be de-rated by 25%. When dimming LED lamps de-rated by 75% - please contact our Technical for compatibility. When using mains voltage halogen load transformer - maximum rating is 210VA. NOTE: For multi-way switching a push to make retractive switch should be installed in the other positions. (Note: standard two way switches will not work with this product)

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | **W:** www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 12/1/2022 11:59:09 PM E&OE