


Code: MOD-C11AB-B

EuroFix | EUROFIX RANGE | Hotel Card Switch with LED Modules

Product Image



Wiring

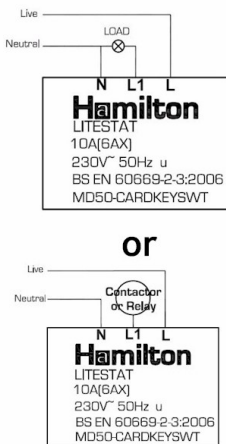


Dimensions

Hamilton®

EUROFIX
MOD-C11

50X50mm Module 10A(6AX) Card Switch On/Off
with Blue LED Locator

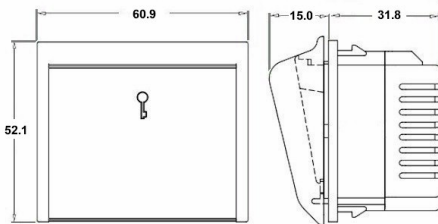

Insert Type

50X50mm Module 10A(6AX) Card Switch On/Off with Blue LED Locator

Insert Colour

Antique Brass/Black

EAN13 Barcode

5017504068226

Commodity Code

85363010

Luckins TSI

393800496

Dimensions(Nominal)

Module: Height = Width = Depth =

Weight

68 GR

Switched Poles

Single

Current Rating

10A (6AX)

Voltage

220/250V AC

Maximum Load

10 Amp (6 Amp inductive)

Mains Frequency

50Hz

IP Rating

IP2XD

Contact Gap Minimum

3mm

Terminal Capacity 1

3x1mm²

Terminal Capacity 2

2x1.5mm²

Terminal Capacity 3

1x2.5mm²

Earth Terminal Capacity 1

5x1mm²

Earth Terminal Capacity 2

4 x 1.5mm²

Earth Terminal Capacity 3

3 x 2.5mm²

Earth Terminal Capacity 4

1 x 4mm² Multi-strand

Earth Terminal Capacity 5

1 x 6mm²

Product Class 1

Face plate must be earthed

Ambient Operating Temperature

-5° to +40°C

Recommended Location

Internal Use Only

Maximum Installation Altitude

2000m

Standard/Approval

BS EN 60669-2-3

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | W: www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 2/8/2023 10:01:07 AM E&OE

Code: MOD-C11AB-B

EuroFix | EUROFIX RANGE | Hotel Card Switch with LED Modules

Additional Notes

Note Mains operated and extra low voltage products must not be installed in the same face plate aperture. When installing within the same back box a suitable phase barriers **MUST** be used to separate the two voltages. See BS 7671 Wiring regulations for further details.

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | **W:** www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes. This datasheet was generated on 2/8/2023 10:01:07 AM E&OE