


Code: 81CSS2USBULTPB-W

Sheer CFX | SHEER CFX RANGE | USB Power Sockets


Product Image



Wiring

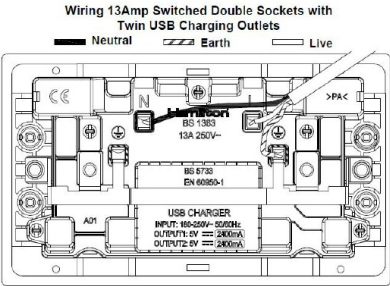

Dimensions

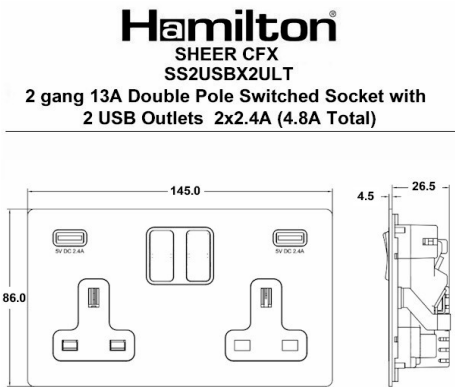

Insert Type	2 gang 13A Double Pole Switched Socket with 2 USB Outlets 2x2.4A (4.8A Total)
Insert Colour	Polished Brass/White
EAN13 Barcode	5017504090364
Commodity Code	85363010
Luckins TSI	405689178
ETIM Class	EC000125
Dimensions(Nominal)	Double: Height = 86.0mm Width = 145.0mm Depth = 1.5mm plate + 3.0mm gasket
Weight	308 GR
Fixing Hole Centres	Box Fixing = 120.6mm Grid Fixing = CFX Clips
Minimum Wall Box Depth	35mm
Switched Poles	Double
Current Rating	13 Amp, USB 2 x 2.4A
Voltage	180/250V AC USB = 5V
Maximum Load	13 Amp, USB = 2.4A X 2
Mains Frequency	50/60Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	3x2.5mm ²
Terminal Capacity 2	3x4mm ²
Terminal Capacity 3	2x6mm ² Multi-Strand
Earth Terminal Capacity 1	3x2.5mm ²
Earth Terminal Capacity 2	3x4mm ²
Earth Terminal Capacity 3	2x6mm ² Multi-Strand
Product Class 1	Must be earthed
Ambient Operating Temperature	-15°C to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS1363 BS EN 62368

DATASHEET

Code: 81CSS2USBULTPB-W

Sheer CFX | SHEER CFX RANGE | USB Power Sockets

Patents And Trade Marks

CFX is a Registered Trade Mark No 2398667 Trade Mark No. 2296586 Sheer CFX is a Registered Design under Reference Nos. R21 = 3020754 SS2 = 3020755

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | **W:** www.hamilton-litestat.com

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 02/05/2024 E&OE