


Code: 84SS2USBULTSS-W

Sheer | SHEER RANGE | USB Power Sockets


Product Image



Wiring

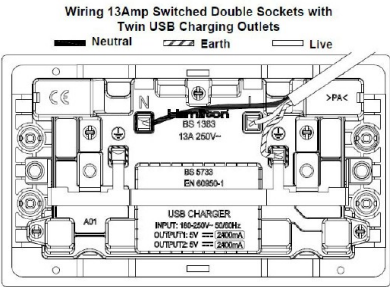

Dimensions

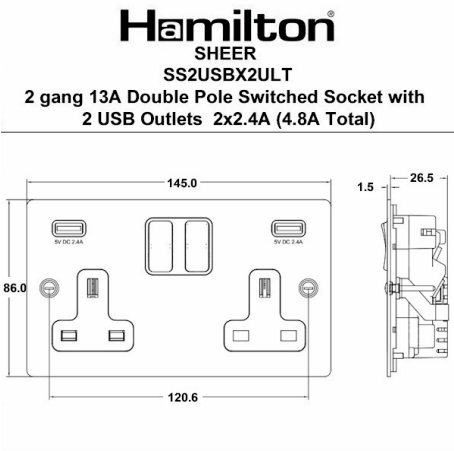

|                               |   |
|-------------------------------|---|
| Insert Type                   | 2 gang 13A Double Pole Switched Socket with 2 USB Outlets 2x2.4A (4.8A Total) |
| Insert Colour                 | Satin Steel/White   |
| EAN13 Barcode                 | 5017504090487   |
| Commodity Code                | 85363010  |
| Luckins TSI                   | 405687141   |
| ETIM Class                    | EC000125  |
| Dimensions(Nominal)           | Double: Height = 86.0mm Width = 146.0mm Depth = 1.5mm                         |
| Weight                        | 308 GR  |
| Fixing Hole Centres           | Box Fixing = 120.6mm Grid Fixing = N/A  |
| Minimum Wall Box Depth        | 35mm  |
| Switched Poles                | Double  |
| Current Rating                | 13 Amp, USB 2 x 2.4A  |
| Voltage                       | 180/250V AC USB = 5V  |
| Maximum Load                  | 13 Amp, USB = 2.4A X 2  |
| Mains Frequency               | 50/60Hz   |
| IP Rating                     | IP2XD   |
| Contact Gap Minimum           | 3mm   |
| Terminal Capacity 1           | 3x2.5mm <sup>2</sup>  |
| Terminal Capacity 2           | 3x4mm <sup>2</sup>  |
| Terminal Capacity 3           | 2x6mm <sup>2</sup> Multi-Strand   |
| Earth Terminal Capacity 1     | 3x2.5mm <sup>2</sup>  |
| Earth Terminal Capacity 2     | 3x4mm <sup>2</sup>  |
| Earth Terminal Capacity 3     | 2x6mm <sup>2</sup> Multi-Strand   |
| Product Class 1               | Must be earthed   |
| Ambient Operating Temperature | -15°C to +40°C  |
| Recommended Location          | Internal Use Only   |
| Maximum Installation Altitude | 2000m   |
| Standard/Approval             | BS1363 BS EN 62368  |
| Patents And Trade Marks       | Sheer is a Registered Trade Mark No. 2296586                                  |