

Code: 89C1XLEDITB100
Sheer CFX | SHEER CFX RANGE | LED Trailing/Leading Edge Push On/Off Rotary 2 Way
Switching Dimmers


Product Image



Wiring



Dimensions

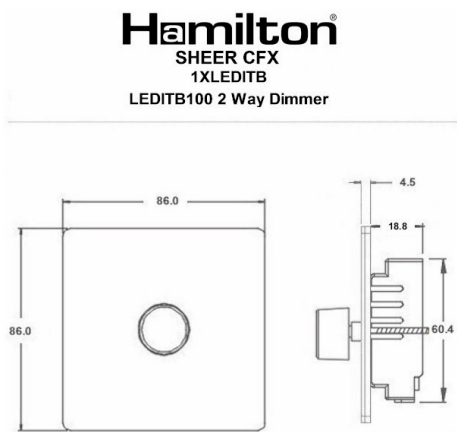

Insert Type	1 gang 100W LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmer
Insert Colour	Antique Brass
EAN13 Barcode	5017504080983
Commodity Code	85365015
Luckins TSI	403372982
ETIM Class	EC000025
Dimensions(Nominal)	Single: Height = 86.0mm Width = 86.0mm Depth = 1.5mm plate + 3.0mm gasket
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = CFX Clips
Minimum Wall Box Depth	35mm
Switched Poles	Single
Current Rating	0.4A
Voltage	230V AC
Maximum Load	5-100W (10 LED Lamps MAX)
Mains Frequency	50Hz
IP Rating	IP2XD
Terminal Capacity 1	2X1mm ²
Terminal Capacity 2	2x1.5mm ²
Earth Terminal Capacity 1	5x1mm ²
Earth Terminal Capacity 2	4X1.5mm ²
Earth Terminal Capacity 3	3X2.5mm ²
Earth Terminal Capacity 4	1X4mm ² Multi-Strand
Earth Terminal Capacity 5	1X6mm ²
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5°C to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN 60669-2-1
Additional Notes	Trailing Edge & Leading Edge Dimmer

Code: 89C1XLEDITB100

Sheer CFX | SHEER CFX RANGE | LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmers

Patents And Trade Marks

CFX is a Registered Trade Mark No 2398667 Trade Mark No. 2296586 Sheer CFX is a Registered Design under Reference Nos. R21 = 3020754 SS2 = 3020755

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | **W:** www.hamilton-litestat.com

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 25/04/2024 E&OE