


Code: 89CSS1USBAB-B
Sheer CFX | SHEER CFX RANGE | USB Power Sockets

Product Image




Wiring

Wiring 13Amp Switched Single
Sockets with USB Charging Outlet
— Neutral — Earth — Live

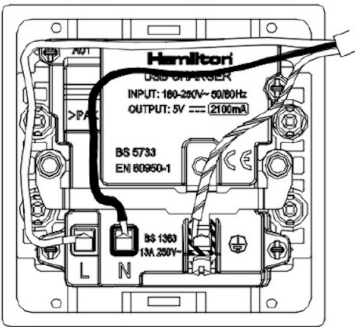

Dimensions

Hamilton®
SHEER CFX
SS1USBX1
USB Charger + Switched Socket

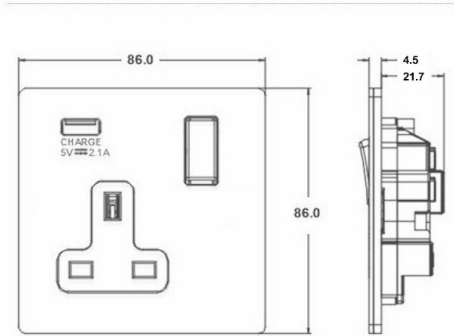

| | |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Insert Type | 1 gang 13A Single Pole Switched Socket with 1 USB Outlet 1x2.1A |
| Insert Colour | Antique Brass/Black |
| EAN13 Barcode | 5017504089627 |
| Commodity Code | 85363010 |
| Luckins TSI | 404388904 |
| ETIM Class | EC000125 |
| Dimensions(Nominal) | Single: Height = 86.0mm Width = 86.0mm Depth = 1.5mm plate + 3.0mm gasket |
| Fixing Hole Centres | Box Fixing = 60.3mm Grid Fixing = CFX Clips |
| Minimum Wall Box Depth | 35mm |
| Switched Poles | Single |
| Current Rating | 13 Amp, USB 1 x 2.1A |
| Voltage | 180/250V AC, USB = 5V |
| Maximum Load | 13 Amp, USB = 2.1A |
| Mains Frequency | 50/60Hz |
| IP Rating | IP2XD |
| Contact Gap Minimum | 3mm |
| Terminal Capacity 1 | 3x2.5mm ² |
| Terminal Capacity 2 | 3x4mm ² |
| Terminal Capacity 3 | 2x6mm ² Multi-Strand |
| Earth Terminal Capacity 1 | 3x2.5mm ² |
| Earth Terminal Capacity 2 | 3x4mm ² |
| Earth Terminal Capacity 3 | 2x6mm ² Multi-Strand |
| Product Class 1 | Must be earthed |
| Ambient Operating Temperature | -15°C to +40°C |
| Recommended Location | Internal Use Only |
| Maximum Installation Altitude | 2000m |
| Standard/Approval | BS1363 BS EN 62368 |
| Patents And Trade Marks | CFX is a Registered Trade Mark No 2398667 Trade Mark No. 2296586 Sheer CFX is a Registered Design under Reference Nos. R21 = 3020754 SS2 =3020755 |