

## 89CTCMB

### Sheer CFX | SHEER CFX RANGE | Telephone and Data Outlets

#### Item Image



#### Wiring

Pin No.	BT Wiring Schedule Colour Codes:
Striped Wires	
1	GREEN / White
2	BLUE / White
3	ORANGE / White
4	WHITE / Orange
5	WHITE / Blue
6	WHITE / Green


Main Wire Colour shown in CAPITALS

Incoming Telephone Cable  
On 4 wire systems, Pin 1 and 6  
are not connected.

The maximum REN that can be connected to any one exchange line is 4. Any number of sockets may be connected. All sockets are connected in parallel, ie Pin 1 to Pin 1 ; Pin 2 to Pin 2 ; etc. as shown in the diagram above.

#### Dimensions

**Hamilton®**  
SHEER CFX  
TCM  
Telephone Master Socket

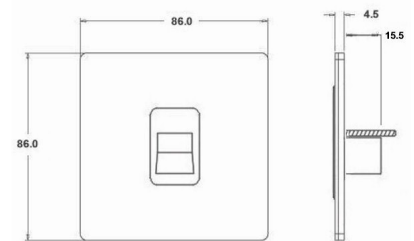

Primary Range	Sheer CFX	
Insert Type	1 gang Telephone Master	
Insert Colour	Black	
EAN13 Barcode	5017504061647	
Commodity Code	85176990	
Luckins TSI	387385781	
Dimensions(Nominal)	Single: Height = 86.0mm Width = 86.0mm Depth = 1.5mm plate + 3.0mm gasket	
Weight	136 GR	
Switched Poles	N/A	
Current Rating	n/a	
IP Rating	IP2XD	
Contact Gap Minimum	N/A	
Earth Terminal Capacity 1	5x1mm <sup>2</sup>	
Earth Terminal Capacity 2	4 x 1.5mm <sup>2</sup>	
Earth Terminal Capacity 3	3 x 2.5mm <sup>2</sup>	
Earth Terminal Capacity 4	1 x 4mm <sup>2</sup> Multi-strand	
Earth Terminal Capacity 5	1 x 6mm <sup>2</sup>	
Product Class 1	Must be earthed (ref BS7671 415.2.1)	
Ambient Operating Temperature	-5° to +40°C	
Recommended Location	Internal Use Only	
Maximum Installation Altitude	2000m	
Standard/Approval	BS 6312:2:2	
All products listed conform to current British or European standard and the product information is correct at the time of going to press.	All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System.	It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.

## 89CTCMB

### Sheer CFX | SHEER CFX RANGE | Telephone and Data Outlets

Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.

Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes.

Correct as at 05 December 2021 11:54 AM  
E&OE

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088 F: +44 (0)1179 710414

E: [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

Registered Office 1 Rushmills, Bedford Road, Northampton NN4 7YB

Registered in London No. 941624 VAT Registration No. 222 6607 84

