

Code: 911XLEDITB100

Cheriton Georgian | CHERITON GEORGAIN RANGE | LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmers

Product Image




Wiring



Dimensions

Hamilton®
 CHERITON GEORGIAN
 1XLEDITB
 LEDITB100 2 Way Dimmer

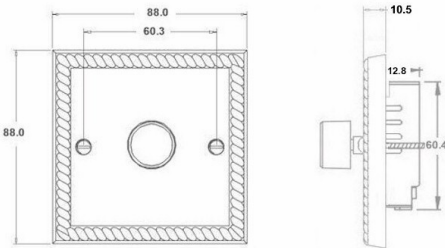

Insert Type

1 gang 100W LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmer

Insert Colour

Antique Brass

EAN13 Barcode

5017504081706

Commodity Code

85365015

Luckins TSI

403374676

Dimensions(Nominal)

Single: Height = 88.0mm Width = 88.0mm Depth = 10.5mm

Fixing Hole Centres

Box Fixing = 60.3mm Grid Fixing = N/A

Switched Poles

Single

Current Rating

0.4A

Voltage

230V AC

Maximum Load

5-100W (10 LED Lamps MAX)

Mains Frequency

50Hz

IP Rating

IP2XD

Terminal Capacity 1

2X1mm²

Terminal Capacity 2

2x1.5mm²

Earth Terminal Capacity 1

5x1mm²

Earth Terminal Capacity 2

4X1.5mm²

Earth Terminal Capacity 3

3X2.5mm²

Earth Terminal Capacity 4

1X4mm² Multi-Strand

Earth Terminal Capacity 5

1X6mm²

Product Class 1

Face plate must be earthed

Ambient Operating Temperature

-5°C to +40°C

Recommended Location

Internal Use Only

Maximum Installation Altitude

2000m

Standard/Approval

BS EN 60669-2-1

Additional Notes

Trailing Edge & Leading Edge Dimmer

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | W: www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 3/31/2023 12:10:51 AM E&OE