


Code: BCAFT21AB-B  
Bloomsbury Fluted Dome | BLOOMSBURY RANGE | Toggle Switches


Product Image



Wiring

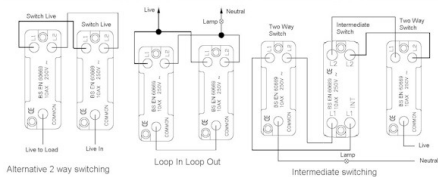

Dimensions

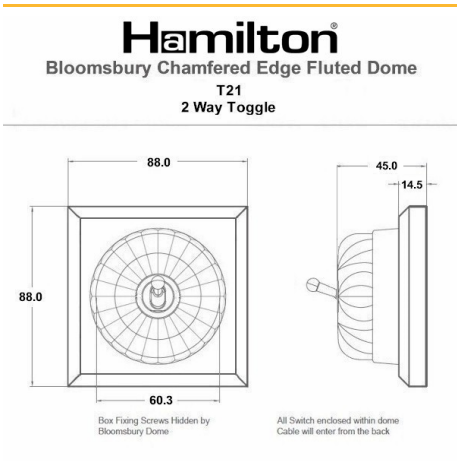

Insert Type	1 gang 20AX 2 Way Toggle
Insert Colour	Antique Brass Fluted Dome/Black Collar
EAN13 Barcode	5028690101857
Commodity Code	85363030
Luckins TSI	391578791
ETIM Class	EC001590
Dimensions(Nominal)	Single: Height = 88.0mm Width = 88.0mm Depth = 14.5mm Plinth, Collar and Dome Depth = 45.0mm
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = N/A
Minimum Wall Box Depth	25mm
Switched Poles	Single
Current Rating	20AX
Voltage	220/250V AC
Maximum Load	20 Amp inductive
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	5x1mm <sup>2</sup>
Terminal Capacity 2	4x1.5mm <sup>2</sup>
Terminal Capacity 3	2x2.5mm <sup>2</sup>
Terminal Capacity 4	2x4mm <sup>2</sup> Multi-strand
Terminal Capacity 5	1x6mm <sup>2</sup>
Earth Terminal Capacity 1	6x1mm <sup>2</sup>
Earth Terminal Capacity 2	5x1.5mm <sup>2</sup>
Earth Terminal Capacity 3	3x2.5mm <sup>2</sup>
Earth Terminal Capacity 4	2x4mm <sup>2</sup> Multi-strand
Earth Terminal Capacity 5	1x6mm <sup>2</sup>
Product Class 1	Double insulation (CI 10.3.2 of BS60669)
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m

**Code:** BCAFT21AB-B  
**Bloomsbury Fluted Dome | BLOOMSBURY RANGE | Toggle Switches**

Standard/ApprovalBS EN 60669-1