

# DATASHEET


**Code:** ICO20W

**GRID-IT | GRID-IT RANGE | Connection Units Modules**

## Product Image



## Wiring

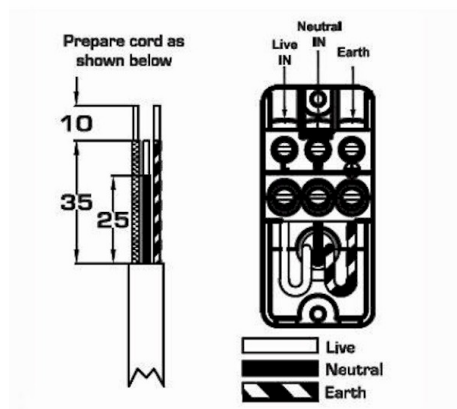


## Dimensions

**Hamilton**<sup>®</sup>

GRID-IT  
GC20

20A Cable Outlet Module



Insert Type	20A Cable Outlet Module
Insert Colour	White
EAN13 Barcode	5051164159368
Commodity Code	85369095
Luckins TSI	387444729
ETIM Class	EC000450
Dimensions(Nominal)	Module: Height = Width = Depth =
Weight	31 GR
Switched Poles	None
Current Rating	20 Amp
Voltage	220/250V AC
Maximum Load	20 Amp
IP Rating	IP2XD
Contact Gap Minimum	None
Terminal Capacity 1	5 x1mm <sup>2</sup>
Terminal Capacity 2	4x1.5mm <sup>2</sup>
Terminal Capacity 3	2x2.5mm <sup>2</sup>
Terminal Capacity 4	2x4mm <sup>2</sup> Multi-strand
Earth Terminal Capacity 1	6x1mm <sup>2</sup>
Earth Terminal Capacity 2	5 x 1.5mm <sup>2</sup>
Earth Terminal Capacity 3	3 x 2.5mm <sup>2</sup>
Earth Terminal Capacity 4	2 x 4mm <sup>2</sup> Multi-strand
Earth Terminal Capacity 5	1 x 6mm <sup>2</sup>
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS 5733

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

**T:** +44 (0)1747 860088

**E:** [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | **W:** [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 20/05/2024 E&OE