


Code: IDPBC-B
GRID-IT | GRID-IT RANGE | Rocker Switch Modules

Product Image




Wiring

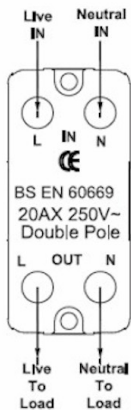

Dimensions

Hamilton®
GRID-IT
GDP
20AX Double Pole Rocker Module



| | |
|-------------------------------|----------------------------------|
| Insert Type | 20AX Double Pole Rocker Module |
| Insert Colour | Bright Chrome/Black |
| EAN13 Barcode | 5051164029630 |
| Commodity Code | 85363030 |
| Luckins TSI | 387390970 |
| ETIM Class | EC001590 |
| Dimensions(Nominal) | Module: Height = Width = Depth = |
| Weight | 43 GR |
| Switched Poles | Double |
| Current Rating | 20AX |
| Voltage | 220/250V AC |
| Maximum Load | 20 Amp inductive |
| Mains Frequency | 50Hz |
| IP Rating | IP2XD |
| Contact Gap Minimum | 3mm |
| Terminal Capacity 1 | 5x1mm ² |
| Terminal Capacity 2 | 4x1.5mm ² |
| Terminal Capacity 3 | 2x2.5mm ² |
| Terminal Capacity 4 | 1x4mm ² Multi-strand |
| Terminal Capacity 5 | 1x6mm ² |
| Earth Terminal Capacity 1 | 6x1mm ² |
| Earth Terminal Capacity 2 | 5x1.5mm ² |
| Earth Terminal Capacity 3 | 3x2.5mm ² |
| Earth Terminal Capacity 4 | 2x4mm ² Multi-strand |
| Earth Terminal Capacity 5 | 1x6mm ² |
| Product Class 1 | Face plate must be earthed |
| Ambient Operating Temperature | -5° to +40°C |
| Recommended Location | Internal Use Only |
| Maximum Installation Altitude | 2000m |
| Standard/Approval | BS EN 60669-1 |