


Code: IDTSAB-B
GRID-IT | GRID-IT RANGE | Multi-Way Touch Slave Controllers Modules

Product Image



Insert Type	Multi-Way Touch Slave Controller Module
Insert Colour	Antique Brass/Black
EAN13 Barcode	5051164019259
Commodity Code	85363010
Luckins TSI	391567896
Dimensions(Nominal)	Module: Height = Width = Depth =
Switched Poles	N/A
Current Rating	The same as Touch Master or Ceiling Dimmer
Voltage	220/250V AC
Maximum Load	The same as Touch Master
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	N/A
Terminal Capacity 1	2x1mm ²
Terminal Capacity 2	2x1.5mm ²
Earth Terminal Capacity 1	5x1mm ²
Earth Terminal Capacity 2	4 x 1.5mm2
Earth Terminal Capacity 3	3 x 2.5mm2
Earth Terminal Capacity 4	1 x 4mm2 Multi-strand
Earth Terminal Capacity 5	1 x 6mm2
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN 60669-2-1
Additional Notes	Tungsten filament GU10 lamps must be branded with a fuse base. When using mains voltage halogen lamps- dimmers should be de-rated by 25%. When using mains voltage halogen load transformer - maximum rating is 210VA. To only be used with Touch Master Dimmers

Wiring

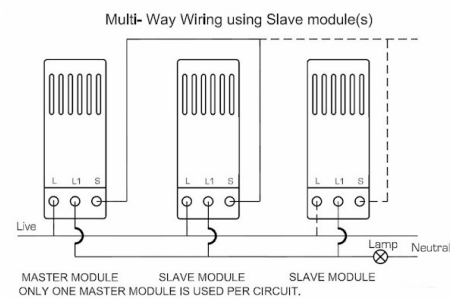

Dimensions

