


Code: IRRTSC-W  
GRID-IT | GRID-IT RANGE | Rocker Switch Modules

Product Image




Wiring

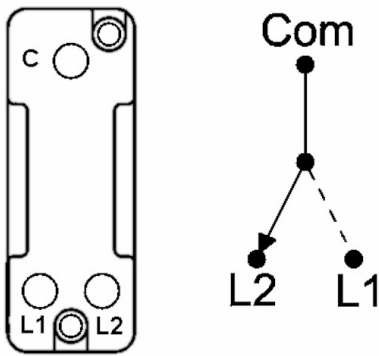

Dimensions

**Hamilton<sup>®</sup>**  
GRID-IT  
GRRT  
10AX Push To Make/Break Retractive Rocker  
Module



Insert Type	10AX Push To Make/Break Retractive Rocker Module
Insert Colour	Satin Chrome/White
EAN13 Barcode	5051164129736
Commodity Code	85363010
Luckins TSI	387391432
ETIM Class	EC001590
Dimensions(Nominal)	Module: Height = Width = Depth =
Weight	30 GR
Switched Poles	Single
Current Rating	10AX
Voltage	220/250V AC
Maximum Load	10 Amp inductive
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	5x1mm <sup>2</sup>
Terminal Capacity 2	4x1.5mm <sup>2</sup>
Terminal Capacity 3	1x2.5mm <sup>2</sup>
Terminal Capacity 4	1x4mm <sup>2</sup> Multi-strand
Terminal Capacity 5	1x6mm <sup>2</sup>
Earth Terminal Capacity 1	5x1mm <sup>2</sup>
Earth Terminal Capacity 2	4x1.5mm <sup>2</sup>
Earth Terminal Capacity 3	3x2.5mm <sup>2</sup>
Earth Terminal Capacity 4	1x4mm <sup>2</sup> Multi-strand
Earth Terminal Capacity 5	1x6mm <sup>2</sup>
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN 60669-1