DATASHEET

Hamilton[®] making connections beautifully


Code: LD1XTSAB-ABB

Linea-Duo CFX | LINEA-DUO CFX RANGE | Multi-Way Touch Slave Controllers

Product Image



Wiring



Dimensions

Insert Type	1 gang Multi-Way Touch Slave Controller
Insert Colour	Antique Brass/Black
EAN13 Barcode	5017504181482
Commodity Code	85363010
Luckins TSI	391639025
ETIM Class	EC000025
Dimensions(Nominal)	Single: Height = 86.0mm Width = 86.0mm Depth = 4.0mm
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = CFX Clips
Minimum Wall Box Depth	35mm
Switched Poles	N/A
Current Rating	The same as Touch Master or Ceiling Dimmer
Voltage	220/250V AC
Maximum Load	The same as Touch Master
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	N/A
Terminal Capacity 1	2x1mm ²
Terminal Capacity 2	2x1.5mm ²
Earth Terminal Capacity 1	5x1mm ²
Earth Terminal Capacity 2	4 x 1.5mm2
Earth Terminal Capacity 3	3 x 2.5mm2
Earth Terminal Capacity 4	1 x 4mm2 Multi-strand
Earth Terminal Capacity 5	1 x 6mm2
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN 60669-2-1

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ


T: +44 (0)1747 860088

E: info@hamilton-litestat.com | **W:** www.hamilton-litestat.com (WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 19/04/2024 E&OE

Code: LD1XTSAB-ABB

Linea-Duo CFX | LINEA-DUO CFX RANGE | Multi-Way Touch Slave Controllers

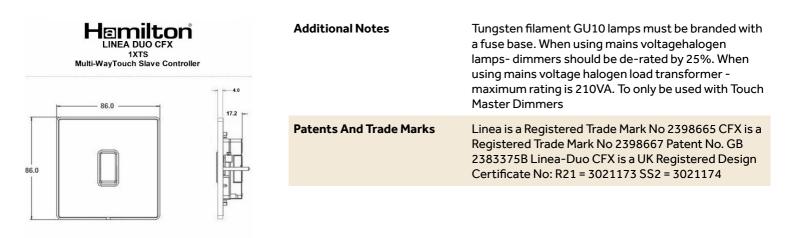

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | **W:** www.hamilton-litestat.com (WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 19/04/2024 E&OE