

# DATASHEET


# Hamilton®

making connections beautifully


Code: LGX1XTSAB-ABB

## Linea-Georgian CFX | LINEA-GEORGIAN CFX RANGE | Multi-Way Touch Slave Controllers


### Product Image

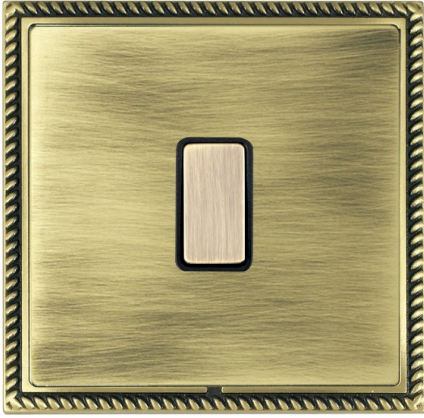

### Wiring

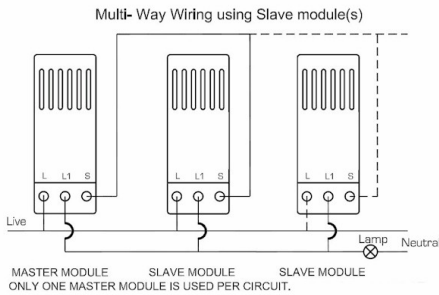

### Dimensions

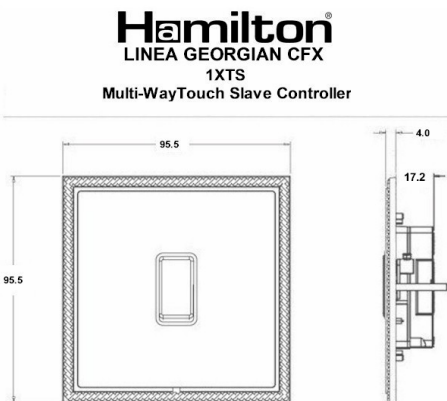

<b>Insert Type</b>	1 gang Multi-Way Touch Slave Controller
<b>Insert Colour</b>	Antique Brass/Black
<b>EAN13 Barcode</b>	5017504791483
<b>Commodity Code</b>	85363010
<b>Luckins TSI</b>	391632873
<b>Dimensions(Nominal)</b>	Single: Height = 95.5mm Width = 95.5mm Depth = 4.0mm
<b>Fixing Hole Centres</b>	Box Fixing = 60.3mm Grid Fixing = CFX Clips
<b>Switched Poles</b>	N/A
<b>Current Rating</b>	The same as Touch Master or Ceiling Dimmer
<b>Voltage</b>	220/250V AC
<b>Maximum Load</b>	The same as Touch Master
<b>Mains Frequency</b>	50Hz
<b>IP Rating</b>	IP2XD
<b>Contact Gap Minimum</b>	N/A
<b>Terminal Capacity 1</b>	2x1mm <sup>2</sup>
<b>Terminal Capacity 2</b>	2x1.5mm <sup>2</sup>
<b>Earth Terminal Capacity 1</b>	5x1mm <sup>2</sup>
<b>Earth Terminal Capacity 2</b>	4 x 1.5mm <sup>2</sup>
<b>Earth Terminal Capacity 3</b>	3 x 2.5mm <sup>2</sup>
<b>Earth Terminal Capacity 4</b>	1 x 4mm <sup>2</sup> Multi-strand
<b>Earth Terminal Capacity 5</b>	1 x 6mm <sup>2</sup>
<b>Product Class 1</b>	Face plate must be earthed
<b>Ambient Operating Temperature</b>	-5° to +40°C
<b>Recommended Location</b>	Internal Use Only
<b>Maximum Installation Altitude</b>	2000m
<b>Standard/Approval</b>	BS EN 60669-2-1
<b>Additional Notes</b>	Tungsten filament GU10 lamps must be branded with a fuse base. When using mains voltage halogen lamps - dimmers should be de-rated by 25%. When using mains voltage halogen load transformer - maximum rating is 210VA. To only be used with Touch Master Dimmers

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | W: [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 3/30/2023 11:45:24 PM E&OE