



Code: LPXR26AB-PBB

Linea-Perlina CFX | LINEA-PERLINA CFX RANGE | Rocker Switches

Product Image

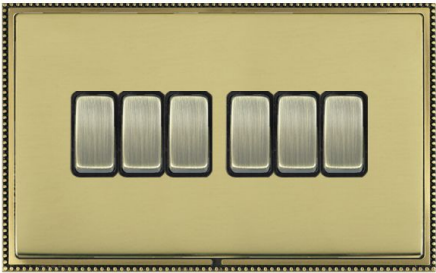

Wiring

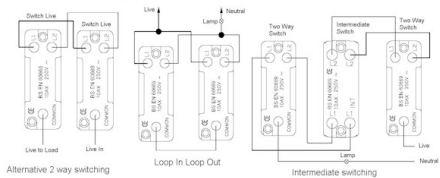


Dimensions

|                               |   |
|-------------------------------|---|
| Insert Type                   | 6 gang 10AX 2 Way Rocker                              |
| Insert Colour                 | Antique Brass/Black                                   |
| EAN13 Barcode                 | 5017504842208   |
| Commodity Code                | 85363010  |
| Luckins TSI                   | 391655371   |
| ETIM Class                    | EC001590  |
| Dimensions(Nominal)           | Double: Height = 92.0mm Width = 151.0mm Depth = 4.0mm |
| Fixing Hole Centres           | Box Fixing = 120.6mm Grid Fixing = CFX Clips          |
| Minimum Wall Box Depth        | 25mm  |
| Switched Poles                | Single  |
| Current Rating                | 10AX  |
| Voltage                       | 220/250V AC   |
| Maximum Load                  | 10 Amp inductive                                      |
| Mains Frequency               | 50Hz  |
| IP Rating                     | IP2XD   |
| Contact Gap Minimum           | 3mm   |
| Terminal Capacity 1           | 5x1mm <sup>2</sup>                                    |
| Terminal Capacity 2           | 4x1.5mm <sup>2</sup>                                  |
| Terminal Capacity 3           | 1x2.5mm <sup>2</sup>                                  |
| Terminal Capacity 4           | 1x4mm <sup>2</sup> Multi-strand                       |
| Terminal Capacity 5           | 1x6mm <sup>2</sup>                                    |
| Earth Terminal Capacity 1     | 5x1mm <sup>2</sup>                                    |
| Earth Terminal Capacity 2     | 4x1.5mm <sup>2</sup>                                  |
| Earth Terminal Capacity 3     | 3x2.5mm <sup>2</sup>                                  |
| Earth Terminal Capacity 4     | 1x4mm <sup>2</sup> Multi-strand                       |
| Earth Terminal Capacity 5     | 1x6mm <sup>2</sup>                                    |
| Product Class 1               | Must be earthed                                       |
| Ambient Operating Temperature | -5° to +40°C  |
| Recommended Location          | Internal Use Only                                     |
| Maximum Installation Altitude | 2000m   |

Code: LPXR26AB-PBB

Linea-Perlina CFX | LINEA-PERLINA CFX RANGE | Rocker Switches

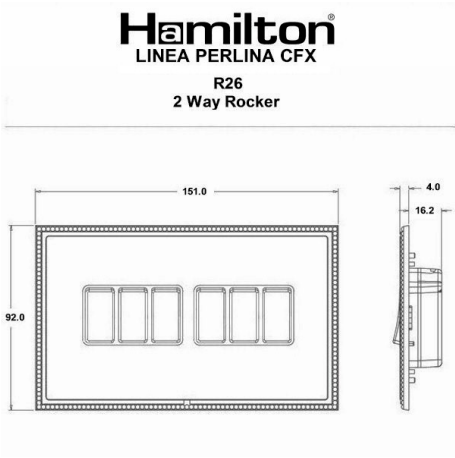

Standard/Approval

BS EN 60669-1

Patents And Trade Marks

Linea is a Registered Trade Mark No 2398665 CFX is a Registered Trade Mark No 2398667 Patent No. GB 2383375B Linea-Perlina CFX SS2 is a UK Registered Design Certificate No. 2066588