


Code: LPXSHSAB-PBB

Linea-Perlina CFX | LINEA-PERLINA CFX RANGE | Power Sockets

Product Image



Wiring

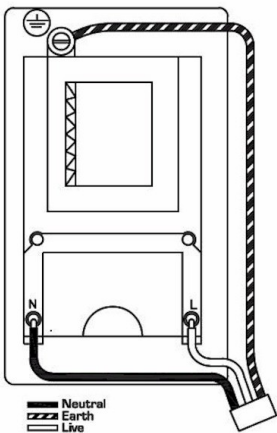


Dimensions

Insert Type	Shaver Dual Voltage Unswitched Socket (Vertically Mounted)
Insert Colour	Black
EAN13 Barcode	5017504841034
Commodity Code	85363010
Luckins TSI	391657049
ETIM Class	EC000186
Dimensions(Nominal)	Double: Height = 151.0mm Width = 92.0mm Depth = 4.0mm
Fixing Hole Centres	Box Fixing = 120.6mm Grid Fixing = CFX Clips
Minimum Wall Box Depth	47mm
Switched Poles	None
Current Rating	20VA
Voltage	220/250V AC
Maximum Load	200/250V input; 115/230V 20VA output
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	None
Terminal Capacity 1	5 x1mm ²
Terminal Capacity 2	4x1.5mm ²
Terminal Capacity 3	3x2.5mm ²
Terminal Capacity 4	2x4mm ² Multi-strand
Terminal Capacity 5	1x6mm ²
Earth Terminal Capacity 1	9x1mm ²
Earth Terminal Capacity 2	6x1.5mm ²
Earth Terminal Capacity 3	4x2.5mm ²
Earth Terminal Capacity 4	2x4mm ² Multi-strand
Earth Terminal Capacity 5	1x6mm ²
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only

Code: LPXSHSAB-PBB

Linea-Perlina CFX | LINEA-PERLINA CFX RANGE | Power Sockets

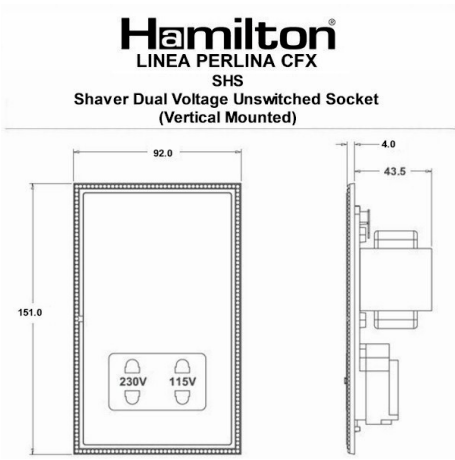

Maximum Installation Altitude	2000m
Standard/Approval	BS EN 61558-2-5 + BS 4573
Additional Notes	Must be mounted vertically. Shuttered :Yes. Box Depth 47mm
Patents And Trade Marks	Linea is a Registered Trade Mark No 2398665 CFX is a Registered Trade Mark No 2398667 Patent No. GB 2383375B Linea-Perlina CFX SS2 is a UK Registered Design Certificate No. 2066588