


## LPXT21AB-AB

### Linea-Perlina CFX | LINEA-PERLINA CFX RANGE | Toggle Switches


#### Item Image



#### Wiring

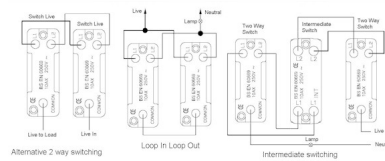



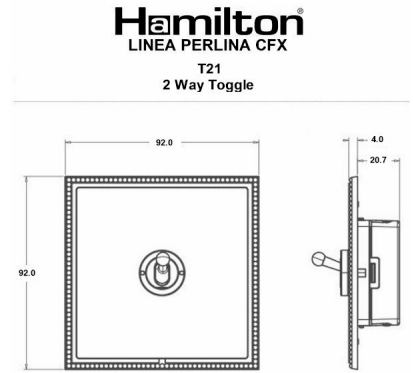



#### Dimensions



Primary Range	Linea-Perlina CFX
Insert Type	1 gang 20AX 2 Way Toggle
Insert Colour	Antique Brass
EAN13 Barcode	5017504862251
Commodity Code	85363030
Luckins TSI	391656558
Dimensions(Nominal)	Single: Height = 92.0mm Width = 92.0mm Depth = 4.0mm
Weight	250 GR
Switched Poles	Single
Current Rating	20AX
Voltage	220/250V AC
Maximum Load	20 Amp inductive
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	5x1mm <sup>2</sup>
Terminal Capacity 2	4x1.5mm <sup>2</sup>
Terminal Capacity 3	2x2.5mm <sup>2</sup>
Terminal Capacity 4	2x4mm <sup>2</sup> Multi-strand
Terminal Capacity 5	1x6mm <sup>2</sup>
Earth Terminal Capacity 1	6x1mm <sup>2</sup>
Earth Terminal Capacity 2	5x1.5mm <sup>2</sup>
Earth Terminal Capacity 3	3x2.5mm <sup>2</sup>
Earth Terminal Capacity 4	2x4mm <sup>2</sup> Multi-strand
Earth Terminal Capacity 5	1x6mm <sup>2</sup>
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m

## LPXT21AB-AB

### Linea-Perlina CFX | LINEA-PERLINA CFX RANGE | Toggle Switches

Standard/Approval	BS EN 60669-1	
All products listed conform to current British or European standard and the product information is correct at the time of going to press.	All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System.	It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.
Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.	Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes.	Correct as at 17 January 2021 02:52 PM E&OE
<p>R Hamilton &amp; Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ</p> <p>T: +44 (0)1747 860088 F: +44 (0)1179 710414</p> <p>E: info@hamilton-litestat.com www.hamilton-litestat.com</p> <p>Registered Office 1 Rushmills, Bedford Road, Northampton NN4 7YB</p> <p>Registered in London No. 941624 VAT Registration No. 222 6607 84</p>		  <p>Listed in  <b>LUCKINS</b></p>    <p>CERT No. 1981138</p>
<p>LPXT21AB-AB - Linea-Perlina CFX Antique Brass Frame/Antique Brass Front 1 gang 20AX 2 Way Toggle Antique Brass</p>		