


Code: LPXT22PB-AB
Linea-Perlina CFX | LINEA-PERLINA CFX RANGE | Toggle Switches

Product Image



Wiring

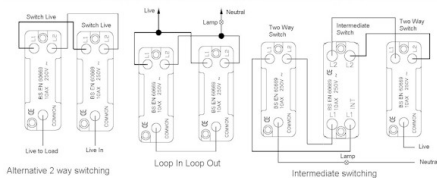


Dimensions

| | |
|-------------------------------|------------------------------------------------------|
| Insert Type | 2 gang 20AX 2 Way Toggle |
| Insert Colour | Polished Brass |
| EAN13 Barcode | 5017504892265 |
| Commodity Code | 85363030 |
| Luckins TSI | 391656642 |
| ETIM Class | EC001590 |
| Dimensions(Nominal) | Single: Height = 92.0mm Width = 92.0mm Depth = 4.0mm |
| Weight | 303 GR |
| Fixing Hole Centres | Box Fixing = 60.3mm Grid Fixing = CFX Clips |
| Minimum Wall Box Depth | 35mm |
| Switched Poles | Single |
| Current Rating | 20AX |
| Voltage | 220/250V AC |
| Maximum Load | 20 Amp inductive |
| Mains Frequency | 50Hz |
| IP Rating | IP2XD |
| Contact Gap Minimum | 3mm |
| Terminal Capacity 1 | 5x1mm ² |
| Terminal Capacity 2 | 4x1.5mm ² |
| Terminal Capacity 3 | 2x2.5mm ² |
| Terminal Capacity 4 | 2x4mm ² Multi-strand |
| Terminal Capacity 5 | 1x6mm ² |
| Earth Terminal Capacity 1 | 6x1mm ² |
| Earth Terminal Capacity 2 | 5x1.5mm ² |
| Earth Terminal Capacity 3 | 3x2.5mm ² |
| Earth Terminal Capacity 4 | 2x4mm ² Multi-strand |
| Earth Terminal Capacity 5 | 1x6mm ² |
| Product Class 1 | Must be earthed |
| Ambient Operating Temperature | -5° to +40°C |
| Recommended Location | Internal Use Only |

Code: LPXT22PB-AB

Linea-Perlina CFX | LINEA-PERLINA CFX RANGE | Toggle Switches

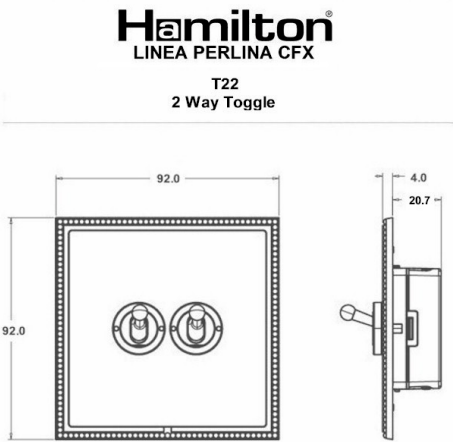

| | |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum Installation Altitude | 2000m |
| Standard/Approval | BS EN 60669-1 |
| Patents And Trade Marks | Linea is a Registered Trade Mark No 2398665 CFX is a Registered Trade Mark No 2398667 Patent No. GB 2383375B Linea-Perlina CFX SS2 is a UK Registered Design Certificate No. 2066588 |