


Code: LPXT31PB-AB  
Linea-Perlina CFX | LINEA-PERLINA CFX RANGE | Toggle Switches

Product Image




Wiring

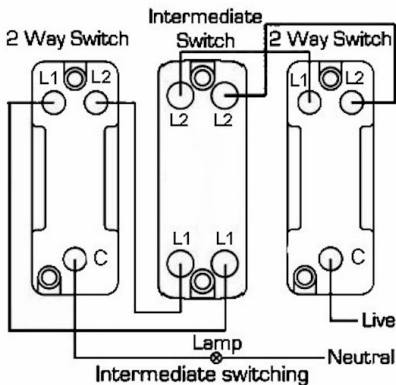

Dimensions

Insert Type	1 gang 20AX Intermediate Toggle
Insert Colour	Polished Brass
EAN13 Barcode	5017504892296
Commodity Code	85363030
Luckins TSI	391656820
ETIM Class	EC001590
Dimensions(Nominal)	Single: Height = 92.0mm Width = 92.0mm Depth = 4.0mm
Weight	278 GR
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = CFX Clips
Minimum Wall Box Depth	35mm
Switched Poles	Single
Current Rating	20AX
Voltage	220/250V AC
Maximum Load	20 Amp inductive
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	5x1mm <sup>2</sup>
Terminal Capacity 2	4x1.5mm <sup>2</sup>
Terminal Capacity 3	2x2.5mm <sup>2</sup>
Terminal Capacity 4	2x4mm <sup>2</sup> Multi-strand
Terminal Capacity 5	1x6mm <sup>2</sup>
Earth Terminal Capacity 1	6x1mm <sup>2</sup>
Earth Terminal Capacity 2	5x1.5mm <sup>2</sup>
Earth Terminal Capacity 3	3x2.5mm <sup>2</sup>
Earth Terminal Capacity 4	2x4mm <sup>2</sup> Multi-strand
Earth Terminal Capacity 5	1x6mm <sup>2</sup>
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only

Code: LPXT31PB-AB  
Linea-Perlina CFX | LINEA-PERLINA CFX RANGE | Toggle Switches

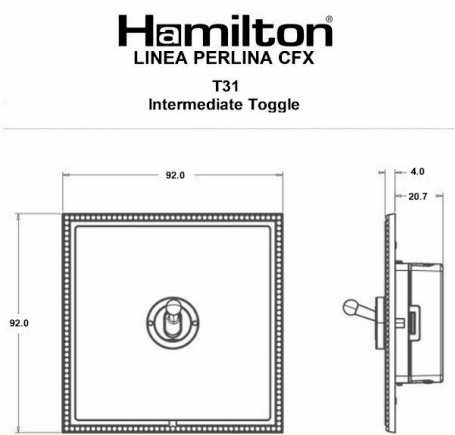

Maximum Installation Altitude	2000m
Standard/Approval	BS EN 60669-1
Patents And Trade Marks	Linea is a Registered Trade Mark No 2398665 CFX is a Registered Trade Mark No 2398667 Patent No. GB 2383375B Linea-Perlina CFX SS2 is a UK Registered Design Certificate No. 2066588