


**Code:** LRXDPNBK-PBB

**Linea-Rondo CFX | LINEA-RONDO CFX RANGE | Double Pole Switches**

## Product Image



## Wiring

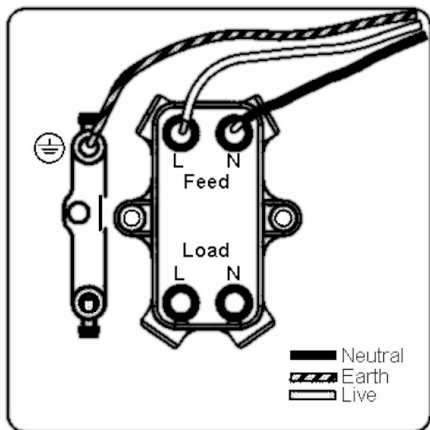

## Dimensions

<b>Insert Type</b>	1 gang 20AX Double Pole Rocker + Neon
<b>Insert Colour</b>	Black Nickel/Black
<b>EAN13 Barcode</b>	5017504382940
<b>Commodity Code</b>	85363030
<b>Luckins TSI</b>	391679742
<b>ETIM Class</b>	EC001590
<b>Dimensions(Nominal)</b>	Single: Height = 91.5mm Width = 91.5mm Depth = 4.0mm
<b>Fixing Hole Centres</b>	Box Fixing = 60.3mm Grid Fixing = CFX Clips
<b>Minimum Wall Box Depth</b>	35mm
<b>Switched Poles</b>	Double
<b>Current Rating</b>	20AX
<b>Voltage</b>	220/250V AC
<b>Maximum Load</b>	20 Amp inductive
<b>Mains Frequency</b>	50Hz
<b>IP Rating</b>	IP2XD
<b>Contact Gap Minimum</b>	3mm
<b>Terminal Capacity 1</b>	3x2.5mm <sup>2</sup>
<b>Terminal Capacity 2</b>	2x4mm <sup>2</sup> Multi-strand
<b>Terminal Capacity 3</b>	1x6mm <sup>2</sup>
<b>Earth Terminal Capacity 1</b>	6x1mm <sup>2</sup>
<b>Earth Terminal Capacity 2</b>	5x1.5mm <sup>2</sup>
<b>Earth Terminal Capacity 3</b>	3x2.5mm <sup>2</sup>
<b>Earth Terminal Capacity 4</b>	2x4mm <sup>2</sup> Multi-strand
<b>Earth Terminal Capacity 5</b>	1x6mm <sup>2</sup>
<b>Product Class 1</b>	Must be earthed
<b>Ambient Operating Temperature</b>	-5° to +40°C
<b>Recommended Location</b>	Internal Use Only
<b>Maximum Installation Altitude</b>	2000m
<b>Standard/Approval</b>	BS EN 60669-1

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

**T:** +44 (0)1747 860088

**E:** info@hamilton-litestat.com | **W:** www.hamilton-litestat.com

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 19/05/2024 E&OE

# DATASHEET


# Hamilton®

making connections beautifully

**Code:** LRXDPNBK-PBB

**Linea-Rondo CFX | LINEA-RONDO CFX RANGE | Double Pole Switches**

**Hamilton®**  
LINEA RONDO CFX  
DPN  
Double Pole Rocker & Neon

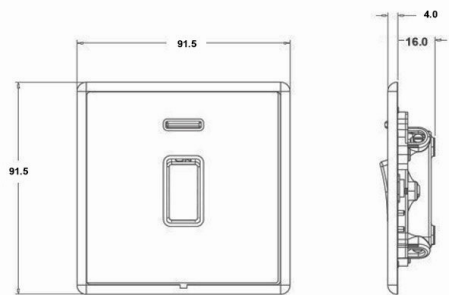

## Patents And Trade Marks

Linea is a Registered Trade Mark No 2398665 CFX is a Registered Trade Mark No 2398667 Patent No. GB 2383375B Community Trd Mark No. 002906428 Linea-Rondo CFX is a UK Registered Design Certificate No: R21=2106349 SS2=2106350

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

**T:** +44 (0)1747 860088

**E:** [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | **W:** [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 19/05/2024 E&OE