


Code: LRXK21BC-PBB  
Linea-Rondo CFX | LINEA-RONDO CFX RANGE | Key Switches

Product Image



Wiring

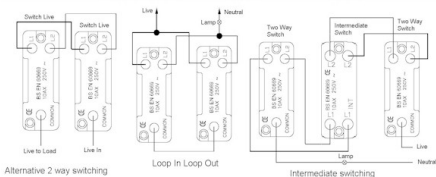


Dimensions

|                               |  |
|-------------------------------|--|
| Insert Type                   | 1 gang 20AX 2 Way Key Switch                         |
| Insert Colour                 | Black  |
| EAN13 Barcode                 | 5017504496692  |
| Commodity Code                | 85363030   |
| Luckins TSI                   | 391680867  |
| ETIM Class                    | EC000029   |
| Dimensions(Nominal)           | Single: Height = 91.5mm Width = 91.5mm Depth = 4.0mm |
| Fixing Hole Centres           | Box Fixing = 60.3mm Grid Fixing = CFX Clips          |
| Minimum Wall Box Depth        | 35mm   |
| Switched Poles                | Single   |
| Current Rating                | 20AX   |
| Voltage                       | 220/250V AC  |
| Maximum Load                  | 20 Amp inductive                                     |
| Mains Frequency               | 50Hz   |
| IP Rating                     | IP2XD  |
| Contact Gap Minimum           | 3mm  |
| Terminal Capacity 1           | 5 x1mm <sup>2</sup>                                  |
| Terminal Capacity 2           | 4x1.5mm <sup>2</sup>                                 |
| Terminal Capacity 3           | 2x2.5mm <sup>2</sup>                                 |
| Terminal Capacity 4           | 2x4mm <sup>2</sup> Multi-strand                      |
| Terminal Capacity 5           | 1x6mm <sup>2</sup>                                   |
| Earth Terminal Capacity 1     | 6x1mm <sup>2</sup>                                   |
| Earth Terminal Capacity 2     | 5x1.5mm <sup>2</sup>                                 |
| Earth Terminal Capacity 3     | 3 x2.5mm <sup>2</sup>                                |
| Earth Terminal Capacity 4     | 2x4mm <sup>2</sup> Multi-strand                      |
| Earth Terminal Capacity 5     | 1x6mm <sup>2</sup>                                   |
| Product Class 1               | Must be earthed                                      |
| Ambient Operating Temperature | -5° to +40°C   |
| Recommended Location          | Internal Use Only                                    |
| Maximum Installation Altitude | 2000m  |

Code: LRXK21BC-PBB

Linea-Rondo CFX | LINEA-RONDO CFX RANGE | Key Switches

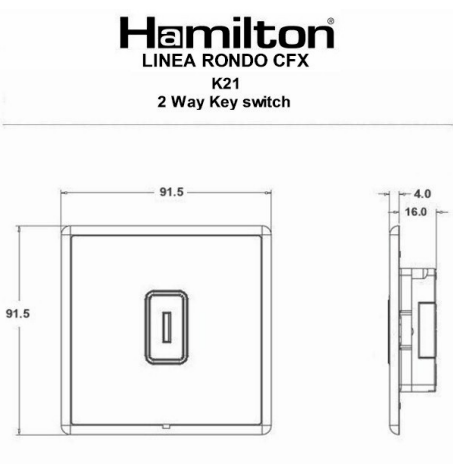

Standard/Approval

BS EN 60669-1

Patents And Trade Marks

Linea is a Registered Trade Mark No 2398665 CFX is a Registered Trade Mark No 2398667 Patent No. GB 2383375B Community Trd Mark No. 002906428 Linea-Rondo CFX is a UK Registered Design Certificate No: R21=2106349 SS2=2106350