

Code: MCSS2USBX2WH-W
Metalclad | METALCLAD RANGE | USB Power Sockets

Product Image




Wiring



Dimensions

Hamilton®

METAL CLAD
MCSS2USBX2
2 gang 13A Single Pole Switched Socket
with 2 USB Outlets 1x1A 1x2.1A

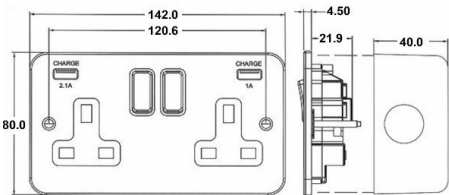

Insert Type	2 gang 13A Single Pole Switched Socket with 2 USB Outlets 1x1A 1x2.1A (3.1A Total)
Insert Colour	White/White
EAN13 Barcode	5017503940288
Commodity Code	85363010
Luckins TSI	405688328
ETIM Class	EC000125
Dimensions(Nominal)	Double: Height = 80.0mm Width = 142.0mm Depth = 41.5mm
Weight	448 GR
Fixing Hole Centres	Box Fixing = 120.6mm Grid Fixing = N/A
Switched Poles	Double
Current Rating	13 Amp, USB 1 x 2.1A, 1 x 1A
Voltage	220/250V AC
Maximum Load	13 Amp with 1 x 2.1A & 1 x 1.1A
Mains Frequency	50Hz
Contact Gap Minimum	3mm
Terminal Capacity 1	4x2.5mm ²
Terminal Capacity 2	3x4mm ²
Terminal Capacity 3	2x6mm ² Multi-Strand
Terminal Capacity 4	1x10mm ²
Earth Terminal Capacity 1	4x2.5mm ²
Earth Terminal Capacity 2	3x4mm ²
Earth Terminal Capacity 3	2x6mm ² Multi-Strand
Earth Terminal Capacity 4	1x1mm ²
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS 1363 + BS 5733 + EN 60950-1
Additional Notes	Must be installed using the supplied 40mm deep Metal Clad back box

Code: MCSS2USBX2WH-W
Metalclad | METALCLAD RANGE | USB Power Sockets