

Hamilton®
making connections beautifully

Perception CFX - on Transparent Plates | PERCEPTION CFX RANGE | Hotel Card Switch with LED

Live

Neutral

LOAD

N L1 L

Hamilton

LUTEST
10A(6AX)
230V 50Hz u
BS EN 60669-2-3:2006
MD50-CARDKEYSWT

or

Live

Neutral

Contactor or Relay

N L1 L


Hamilton

LUTEST
10A(6AX)
230V 50Hz u
BS EN 60669-2-3:2006
MD50-CARDKEYSWT

Insert Type	1 gang 10A (6AX) Card Switch On/Off with Blue LED Locator
Insert Colour	Antique Brass/Black
EAN13 Barcode	5017504021160
Commodity Code	85363010
Luckins TSI	394056977
ETIM Class	EC000029
Dimensions(Nominal)	Single: Height = 86.0mm Width = 86.0mm Depth = 4.0mm
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = CFX Push
Minimum Wall Box Depth	35mm
Switched Poles	Single
Current Rating	10A (6AX)
Voltage	220/250V AC
Maximum Load	10 Amp (6 Amp inductive)
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	3x1mm ²
Terminal Capacity 2	2x1.5mm ²
Terminal Capacity 3	1x2.5mm ²
Earth Terminal Capacity 1	5x1mm ²
Earth Terminal Capacity 2	4 x 1.5mm2
Earth Terminal Capacity 3	3 x 2.5mm2
Earth Terminal Capacity 4	1 x 4mm2 Multi-strand
Earth Terminal Capacity 5	1 x 6mm2
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN 60669-2-3

Code: PCC11AB-B
Perception CFX - on Transparent Plates | PERCEPTION CFX RANGE | Hotel Card Switch with LED

Hamilton®
PERCEPTION CFX
C11
Card Switch

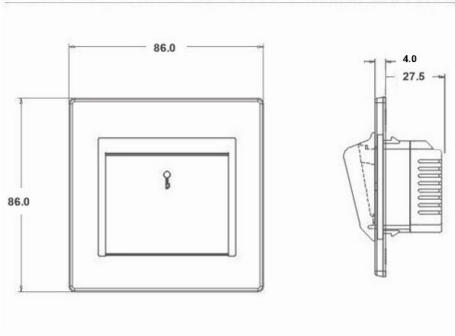

Additional Notes	Adjustable Time Delay 10 seconds - 5 minutes. Suitable for 44mm and 54mm width Hotel Key Cards
Patents And Trade Marks	Perception is a Registered Trade Mark No 2560269 CFX is a Registered Trade Mark No 2398667