


Code: PCDTRIDB
Perception CFX - on Transparent Plates | PERCEPTION CFX RANGE | Digital Television
Sockets - Screened Non-Isolated/DAB Compatible


Product Image



Wiring




- 1. Undo the cable clamp screw.
- 2. Lift up the cover of the clamp, be careful not to displace the EMC gasket which is located on the cover.
- 3. Insert the conductor into the terminal slot which is located in the casing of the module.
- 4. Before closing the cover check to ensure that conductor, screening braid and cable are in the correct position as shown below.
- 5. Carefully close the cover of the module ensuring that the EMC gasket is not displaced or damaged. Then tighten the cable clamp screw.



Dimensions

Hamilton®
PERCEPTION CFX
DTRID
Non-Isolated TV/FM/Satellite1
Triplexer 1in/3out

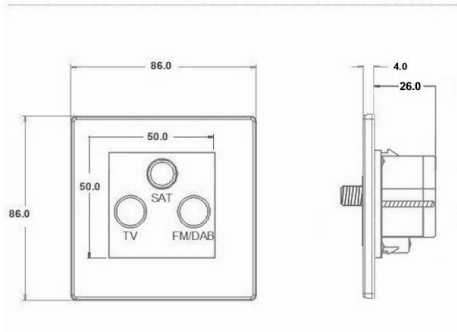

Insert Type	Non-Isolated TV+FM+SAT Triplexer 1in/3out (DAB Compatible)
Insert Colour	Black
EAN13 Barcode	5017504021740
Commodity Code	85367000
Luckins TSI	394057251
ETIM Class	EC000439
Dimensions(Nominal)	Single: Height = 86.0mm Width = 86.0mm Depth = 4.0mm
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = CFX Push
Minimum Wall Box Depth	35mm
Switched Poles	N/A
Current Rating	n/a
IP Rating	IP2XD
Contact Gap Minimum	N/A
Earth Terminal Capacity 1	5x1mm²
Earth Terminal Capacity 2	4 x 1.5mm2
Earth Terminal Capacity 3	3 x 2.5mm2
Earth Terminal Capacity 4	1 x 4mm2 Multi-strand
Earth Terminal Capacity 5	1 x 6mm2
Product Class 1	Must be earthed (ref BS7671 415.2.1)
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN 50083-2:2012/A1; 2015. BS EN 61169-2:2007. BS EN 61169-24:2009
Patents And Trade Marks	Perception is a Registered Trade Mark No 2560269 CFX is a Registered Trade Mark No 2398667