

# DATASHEET

Code: 71CSS1USBPB-B

Hartland CFX | HARTLAND CFX RANGE | USB Power Sockets


### Product Image




### Wiring

Wiring 13Amp Switched Single  
Sockets with USB Charging Outlet

— Neutral    — Earth    — Live

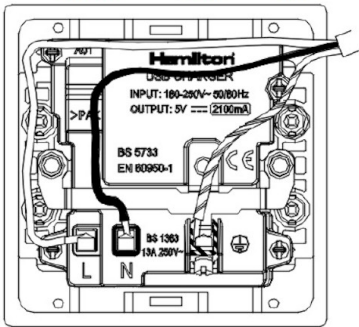

### Dimensions

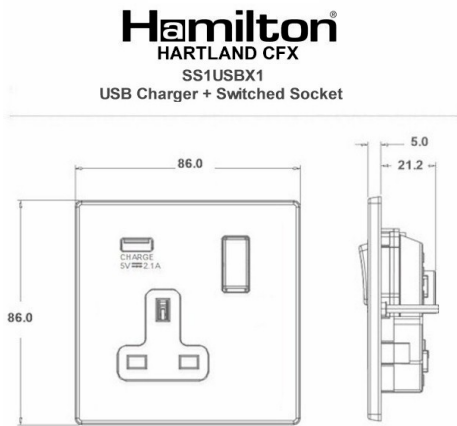

Insert Type	1 gang 13A Single Pole Switched Socket with 1 USB Outlet 1x2.1A
Insert Colour	Polished Brass/Black
EAN13 Barcode	5017504088842
Commodity Code	85363010
Luckins TSI	404387170
ETIM Class	EC000125
Dimensions(Nominal)	Single: Height = 86.0mm Width = 86.0mm Depth = 5.0mm
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = CFX Clips
Minimum Wall Box Depth	35mm
Switched Poles	Single
Current Rating	13 Amp, USB 1 x 2.1A
Voltage	180/250V AC, USB = 5V
Maximum Load	13 Amp, USB = 2.1A
Mains Frequency	50/60Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	3x2.5mm <sup>2</sup>
Terminal Capacity 2	3x4mm <sup>2</sup>
Terminal Capacity 3	2x6mm <sup>2</sup> Multi-Strand
Earth Terminal Capacity 1	3x2.5mm <sup>2</sup>
Earth Terminal Capacity 2	3x4mm <sup>2</sup>
Earth Terminal Capacity 3	2x6mm <sup>2</sup> Multi-Strand
Product Class 1	Must be earthed
Ambient Operating Temperature	-15°C to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS1363 BS EN 62368
Patents And Trade Marks	CFX is a Registered Trade Mark No 2398667 Hartland CFX is a Registered Design under Reference Nos. R21 = 3023446 SS2 =3023445