

DATASHEET

Code: 76SS1USBSC-B

Hartland | HARTLAND RANGE | USB Power Sockets


Product Image




Wiring

Wiring 13Amp Switched Single Sockets with USB Charging Outlet

— Neutral    ▨ Earth    — Live

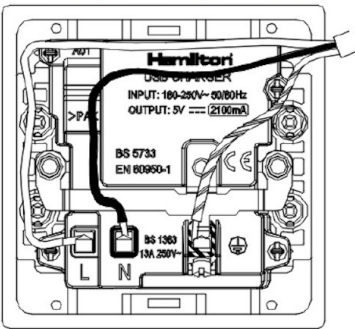

Dimensions

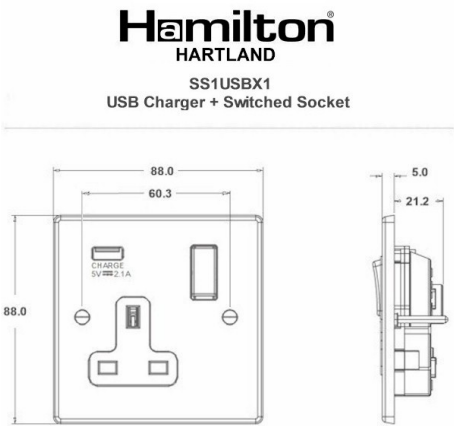

Insert Type 1 gang 13A Single Pole Switched Socket with 1 USB Outlet 1x2.1A

Insert Colour Satin Chrome/Black

EAN13 Barcode 5017504088996

Commodity Code 85363010

Luckins TSI 404387183

ETIM Class EC000125

Dimensions(Nominal) Single: Height = 88.0mm Width = 88.0mm Depth = 5.0mm

Weight 139 GR

Fixing Hole Centres Box Fixing = 60.3mm Grid Fixing = N/A

Minimum Wall Box Depth 35mm

Switched Poles Single

Current Rating 13 Amp, USB 1 x 2.1A

Voltage 180/250V AC, USB = 5V

Maximum Load 13 Amp, USB = 2.1A

Mains Frequency 50/60Hz

IP Rating IP2XD

Contact Gap Minimum 3mm

Terminal Capacity 1 3x2.5mm<sup>2</sup>

Terminal Capacity 2 3x4mm<sup>2</sup>

Terminal Capacity 3 2x6mm<sup>2</sup> Multi-Strand

Earth Terminal Capacity 1 3x2.5mm<sup>2</sup>

Earth Terminal Capacity 2 3x4mm<sup>2</sup>

Earth Terminal Capacity 3 2x6mm<sup>2</sup> Multi-Strand

Product Class 1 Must be earthed

Ambient Operating Temperature -15°C to +40°C

Recommended Location Internal Use Only

Maximum Installation Altitude 2000m

Standard/Approval BS1363 BS EN 62368

Patents And Trade Marks Hartland is a Registered Trade Mark No. 2344778