


Code: 79CT21

Hartland CFX | HARTLAND CFX RANGE | Toggle Switches

Product Image



Wiring

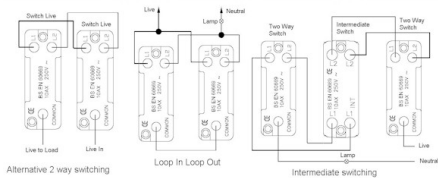


Dimensions

Insert Type	1 gang 20AX 2 Way Toggle
Insert Colour	Antique Brass
EAN13 Barcode	5017504299255
Commodity Code	85363030
Luckins TSI	388242014
ETIM Class	EC001590
Dimensions(Nominal)	Single: Height = 86.0mm Width = 86.0mm Depth = 5.0mm
Weight	203 GR
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = CFX Clips
Minimum Wall Box Depth	35mm
Switched Poles	Single
Current Rating	20AX
Voltage	220/250V AC
Maximum Load	20 Amp inductive
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	5x1mm ²
Terminal Capacity 2	4x1.5mm ²
Terminal Capacity 3	2x2.5mm ²
Terminal Capacity 4	2x4mm ² Multi-strand
Terminal Capacity 5	1x6mm ²
Earth Terminal Capacity 1	6x1mm ²
Earth Terminal Capacity 2	5x1.5mm ²
Earth Terminal Capacity 3	3x2.5mm ²
Earth Terminal Capacity 4	2x4mm ² Multi-strand
Earth Terminal Capacity 5	1x6mm ²
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only

Code: 79CT21

Hartland CFX | HARTLAND CFX RANGE | Toggle Switches

Hamilton[®]
HARTLAND CFX
T21
2 Way Toggle

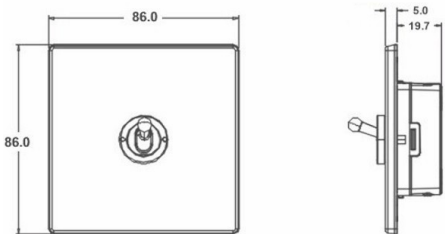

Maximum Installation Altitude	2000m
Standard/Approval	BS EN 60669-1
Patents And Trade Marks	CFX is a Registered Trade Mark No 2398667 Hartland CFX is a Registered Design under Reference Nos. R21 = 3023446 SS2 =3023445