


Code: 79DTRIDB

Hartland | HARTLAND RANGE | Digital Television Sockets - Screened Non-Isolated/DAB Compatible

Product Image



Wiring




1. Undo the cable clamp screw.

2. Lift up the cover of the clamp, be careful not to displace the EMC gasket which is located on the cover.

3. Insert the conductor into the terminal slot which is located in the casing of the module.

4. Before closing the cover check to ensure that conductor, screening braid and cable are in the correct position as shown below.

5. Carefully close the cover of the module ensuring that the EMC gasket is not displaced or damaged. Then tighten the cable clamp screw.



Dimensions


Hamilton®

HARTLAND

DTRID

Non-Isolated TV/FM/Satellite1

Triplexer 1in/3out

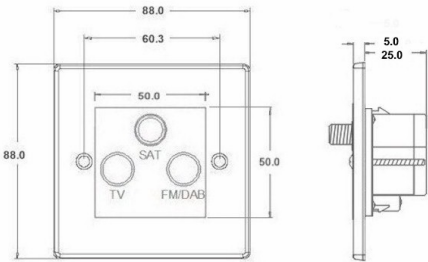

Insert Type	Non-Isolated TV+FM+SAT Triplexer 1in/3out (DAB Compatible)
Insert Colour	Black
EAN13 Barcode	5017504016395
Commodity Code	85367000
Luckins TSI	391429002
ETIM Class	EC000439
Dimensions(Nominal)	Single: Height = 88.0mm Width = 88.0mm Depth = 5.0mm
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = N/A
Minimum Wall Box Depth	35mm
Switched Poles	N/A
Current Rating	n/a
IP Rating	IP2XD
Contact Gap Minimum	N/A
Earth Terminal Capacity 1	5x1mm ²
Earth Terminal Capacity 2	4 x 1.5mm ²
Earth Terminal Capacity 3	3 x 2.5mm ²
Earth Terminal Capacity 4	1 x 4mm ² Multi-strand
Earth Terminal Capacity 5	1 x 6mm ²
Product Class 1	Must be earthed (ref BS7671 415.2.1)
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN 50083-2:2012/A1; 2015. BS EN 61169-2:2007. BS EN 61169-24:2009
Patents And Trade Marks	Hartland is a Registered Trade Mark No. 2344778