


Code: 79SS1AB-B
Hartland | HARTLAND RANGE | Power Sockets

Product Image



Wiring

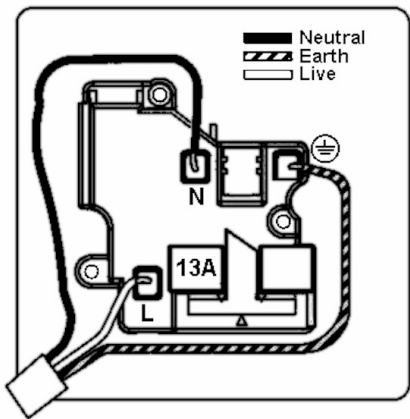

Dimensions

Insert Type	1 gang 13A Double Pole Switched Socket
Insert Colour	Antique Brass/Black
EAN13 Barcode	5017503292011
Commodity Code	85363010
Luckins TSI	386903944
ETIM Class	EC000125
Dimensions(Nominal)	Single: Height = 88.0mm Width = 88.0mm Depth = 5.0mm
Weight	130 GR
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = N/A
Minimum Wall Box Depth	35mm
Switched Poles	Double
Current Rating	13 Amp
Voltage	220/250V AC
Maximum Load	13 Amp
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	4x2.5mm ²
Terminal Capacity 2	3x4mm ²
Terminal Capacity 3	2x6mm ² Multi-Strand
Terminal Capacity 4	1x10mm ²
Earth Terminal Capacity 1	4x2.5mm ²
Earth Terminal Capacity 2	3x4mm ²
Earth Terminal Capacity 3	2x6mm ² Multi-Strand
Earth Terminal Capacity 4	1x10mm ²
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS 1363-2

DATASHEET

Code: 79SS1AB-B

Hartland | HARTLAND RANGE | Power Sockets

Hamilton[®]

HARTLAND

SS1

Switched Socket

Additional Notes	Dual Earth: Yes
Patents And Trade Marks	Hartland is a Registered Trade Mark No. 2344778

