

Code: 7G29TCMB
Hartland G2 | HARTLAND G2 RANGE | Telephone and Data Outlets

Product Image



Wiring


Pin No.	BT Wiring Schedule Colour Codes: Striped Wires
1	GREEN / White
2	BLUE / White
3	ORANGE / White
4	WHITE / Orange
5	WHITE / Blue
6	WHITE / Green
Main Wire Colour shown in CAPITALS	

Incoming Telephone Cable
On 4 wire systems, Pin 1 and 6
are not connected.

The maximum REN that can be connected to any
one exchange line is 4. Any number of sockets may
be connected. All sockets are connected in parallel,
ie Pin 1 to Pin 1 ; Pin 2 to Pin 2 ; etc. as shown in
the diagram above.

Dimensions

Hamilton®
HARTLAND G2
TCM
Telephone Master Socket

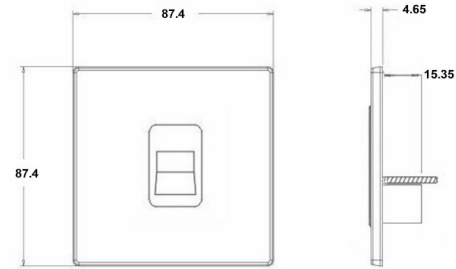

Insert Type	1 gang Telephone Master
Insert Colour	Black
EAN13 Barcode	5051164003401
Commodity Code	85176990
Luckins TSI	407517358
ETIM Class	EC000018
Dimensions(Nominal)	Single: Height = 87.4mm Width = 87.4mm Depth = 4.65mm
Weight	97 GR
Fixing Hole Centres	Box Fixing = 60.3mm
Minimum Wall Box Depth	25mm
Switched Poles	N/A
Current Rating	n/a
IP Rating	IP2XD
Contact Gap Minimum	N/A
Earth Terminal Capacity 1	5x1mm²
Earth Terminal Capacity 2	4 x 1.5mm2
Earth Terminal Capacity 3	3 x 2.5mm2
Earth Terminal Capacity 4	1 x 4mm2 Multi-strand
Earth Terminal Capacity 5	1 x 6mm2
Product Class 1	Must be earthed (ref BS7671 415.2.1)
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS 6312:2:2
Patents And Trade Marks	Hartland G2 is a Registered Trade Mark No UK00003388376