


Code: 7G2AFNGA-R
Hartland G2 | HARTLAND G2 RANGE | Connection Units

Product Image




Wiring

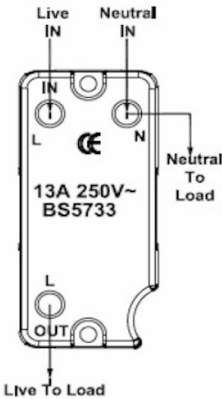

Dimensions

Hamilton®
HARTLAND G2
FN
Fuse with Red Neon Halo

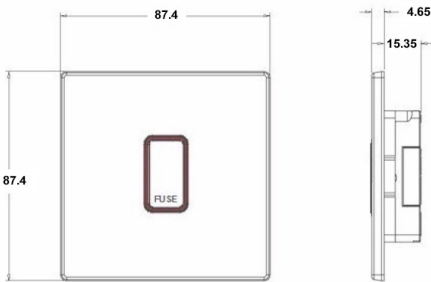

Insert Type	1 gang 13A Fuse with Red Neon Halo
Insert Colour	Anthra Gray/Red
EAN13 Barcode	5051164028770
Commodity Code	85361050
Luckins TSI	433715506
ETIM Class	EC000036
Dimensions(Nominal)	Single: Height = 87.4mm Width = 87.4mm Depth = 4.65mm
Fixing Hole Centres	Box Fixing = 60.3mm
Minimum Wall Box Depth	35mm
Switched Poles	None
Current Rating	13 Amp
Voltage	220/250V AC
Maximum Load	13 Amp
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	3x2.5mm²
Terminal Capacity 2	2x4mm² Multi-strand
Terminal Capacity 3	1x6mm²
Earth Terminal Capacity 1	6x1mm²
Earth Terminal Capacity 2	5 x 1.5mm2
Earth Terminal Capacity 3	3 x 2.5mm2
Earth Terminal Capacity 4	2 x 4mm2 Multi-strand
Earth Terminal Capacity 5	1 x 6mm2
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS 5733 with Fuse link to BS 1362

Code: 7G2AFNGA-R
Hartland G2 | HARTLAND G2 RANGE | Connection Units

Patents And Trade Marks	Hartland G2 is a Registered Trade Mark No UK00003388376
-------------------------	--