


Code: 7HBCR21BL-B
Hartland CFX | HARTLAND CFX RANGE | Rocker Switches

Product Image



NO IMAGE


Wiring

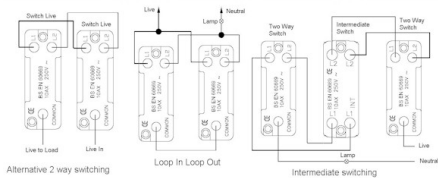

Dimensions

Insert Type	1 gang 10AX 2 Way Rocker
Insert Colour	Black/Black
EAN13 Barcode	5017504013042
Commodity Code	85363010
Luckins TSI	398275453
ETIM Class	EC001590
Dimensions(Nominal)	Single: Height = 86.0mm Width = 86.0mm Depth = 5.0mm
Weight	197 GR
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = CFX Clips
Minimum Wall Box Depth	25mm
Switched Poles	Single
Current Rating	10AX
Voltage	220/250V AC
Maximum Load	10 Amp inductive
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	5x1mm ²
Terminal Capacity 2	4x1.5mm ²
Terminal Capacity 3	1x2.5mm ²
Terminal Capacity 4	1x4mm ² Multi-strand
Terminal Capacity 5	1x6mm ²
Earth Terminal Capacity 1	5x1mm ²
Earth Terminal Capacity 2	4x1.5mm ²
Earth Terminal Capacity 3	3x2.5mm ²
Earth Terminal Capacity 4	1x4mm ² Multi-strand
Earth Terminal Capacity 5	1x6mm ²
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only

Code: 7HBCR21BL-B
Hartland CFX | HARTLAND CFX RANGE | Rocker Switches

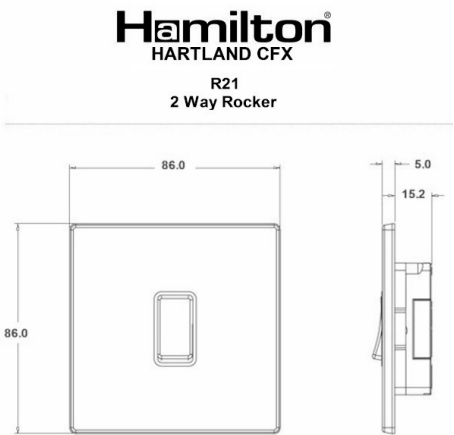

Maximum Installation Altitude	2000m
Standard/Approval	BS EN 60669-1
Patents And Trade Marks	CFX is a Registered Trade Mark No 2398667 Hartland CFX is a Registered Design under Reference Nos. R21 = 3023446 SS2 =3023445