

# DATASHEET

# Hamilton®

making connections beautifully


Code: 7G21DENTW

## Hartland G2 | HARTLAND G2 RANGE | Digital Television Sockets - Screened Non-Isolated/DAB Compatible


### Product Image



### Wiring




1. Undo the cable clamp screw.
2. Lift up the cover of the clamp, be careful not to displace the EMC gasket which is located on the cover.
3. Insert the conductor into the terminal slot which is located in the casing of the module.
4. Before closing the cover check to ensure that conductor, screening braid and cable are in the correct position as shown below.
5. Carefully close the cover of the module ensuring that the EMC gasket is not displaced or damaged. Then tighten the cable clamp screw.



### Dimensions

**Hamilton®**  
HARTLAND G2  
DENT

Non-Isolated TV/FM/Satellite1/Satellite2  
Quadplexer 2in/4out

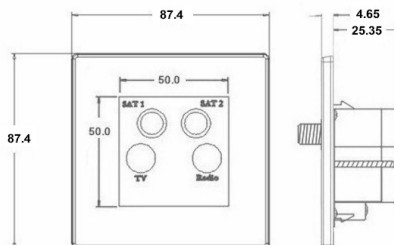

### Insert Type

Non-Isolated TV+FM+SAT1+SAT2 Quadplexer  
2in/4out (DAB Compatible)

### Insert Colour

White

### EAN13 Barcode

5051164024550

### Commodity Code

85367000

### Luckins TSI

423823505

### ETIM Class

EC000439

### Dimensions(Nominal)

Single: Height = 87.4mm Width = 87.4mm Depth = 4.65mm

### Fixing Hole Centres

Box Fixing = 60.3mm

### Minimum Wall Box Depth

35mm

### Switched Poles

N/A

### Current Rating

n/a

### IP Rating

IP2XD

### Contact Gap Minimum

N/A

### Earth Terminal Capacity 1

5x1mm<sup>2</sup>

### Earth Terminal Capacity 2

4 x 1.5mm<sup>2</sup>

### Earth Terminal Capacity 3

3 x 2.5mm<sup>2</sup>

### Earth Terminal Capacity 4

1 x 4mm<sup>2</sup> Multi-strand

### Earth Terminal Capacity 5

1 x 6mm<sup>2</sup>

### Product Class 1

Must be earthed (ref BS7671 415.2.1)

### Ambient Operating Temperature

-5° to +40°C

### Recommended Location

Internal Use Only

### Maximum Installation Altitude

2000m

### Standard/Approval

BS EN 50581:2012, BS EN 60728-4:2008, BS EN 50083-2: 2012/A1:2015

### Patents And Trade Marks

Hartland G2 is a Registered Trade Mark No  
UK00003388376

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | W: [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 19/05/2024 E&OE