

Code: 7G283XLEDITB100
Hartland G2 | HARTLAND G2 RANGE | LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmers


Product Image



Wiring



Dimensions

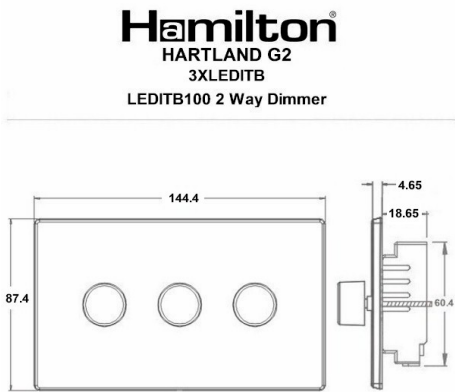

Insert Type	3 gang 100W LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmer
Insert Colour	Black Nickel
EAN13 Barcode	5051164005344
Commodity Code	85365015
Luckins TSI	407520918
ETIM Class	EC000025
Dimensions(Nominal)	Double: Height = 87.4mm Width = 144.4mm Depth = 4.65mm
Fixing Hole Centres	Box Fixing = 120.6mm
Minimum Wall Box Depth	35mm
Switched Poles	Single
Current Rating	0.3A Per Gang
Voltage	230V AC
Maximum Load	5-70W Per Gang
Mains Frequency	50Hz
IP Rating	IP2XD
Terminal Capacity 1	2X1mm ²
Terminal Capacity 2	2X1.5mm ²
Earth Terminal Capacity 1	5x1mm ²
Earth Terminal Capacity 2	4X1.5mm ²
Earth Terminal Capacity 3	3X2.5mm ²
Earth Terminal Capacity 4	1X4mm ² Multi-Strand
Earth Terminal Capacity 5	1X6mm ²
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5°C to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN 60669-2-1
Additional Notes	Trailing Edge & Leading Edge Dimmer
Patents And Trade Marks	Hartland G2 is a Registered Trade Mark No UK00003388376

Code: 7G283XLEDITB100
Hartland G2 | HARTLAND G2 RANGE | LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmers