

DATASHEET

Code: MOD-UNIVW

EuroFix | EUROFIX RANGE | Power Sockets Modules


Product Image



Wiring



Dimensions

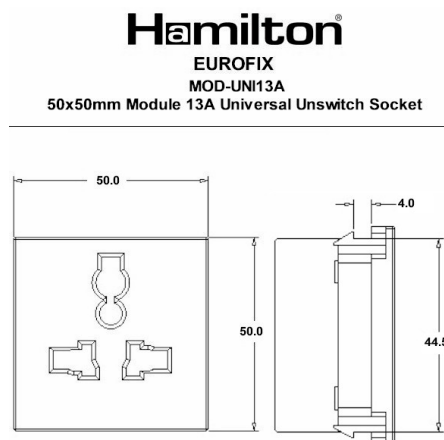

Insert Type	50x50mm Module 16A Universal Unswitch Socket
Insert Colour	White
EAN13 Barcode	5017504068783
Commodity Code	85363010
Luckins TSI	398666431
ETIM Class	EC000125
Dimensions(Nominal)	Module: Height = Width = Depth =
Weight	52 GR
Switched Poles	None
Current Rating	16 Amp
Voltage	220/250V AC
Maximum Load	16 Amp
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	None
Terminal Capacity 1	3x2.5mm ²
Terminal Capacity 2	3x4mm ²
Terminal Capacity 3	2x6mm ² Multi-strand
Terminal Capacity 4	1x10mm ²
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN ISO 5733 + IEC 60884-1
Additional Notes	Note Mains operated and extra low voltage products must not be installed in the same face plate aperture. When installing within the same back box a suitable phase barriers MUST be used to separate the two voltages. See BS 7671 Wiring regulations for further details.
Patents And Trade Marks	EuroFix is a Registered Trade Mark No. 2560270

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | W: www.hamilton-litestat.com

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 19/05/2024 E&OE