

DATASHEET

Hamilton®

making connections beautifully


Code: 79DENTB

Hartland | HARTLAND RANGE | Digital Television Sockets - Screened Non-Isolated/DAB Compatible


Product Image



Wiring




1. Undo the cable clamp screw.
2. Lift up the cover of the clamp, be careful not to displace the EMC gasket which is located on the cover.
3. Insert the conductor into the terminal slot which is located in the casing of the module.
4. Before closing the cover check to ensure that conductor, screening braid and cable are in the correct position as shown below.
5. Carefully close the cover of the module ensuring that the EMC gasket is not displaced or damaged. Then tighten the cable clamp screw.



Dimensions

Hamilton®
HARTLAND
DENT

Non-Isolated TV/FM/Satellite1/Satellite2
Quadplexer 2in/4out

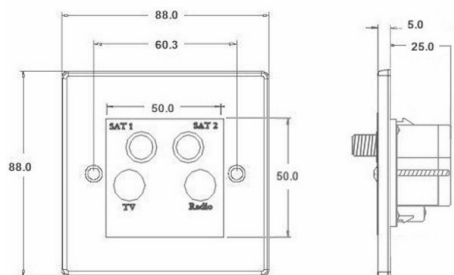

Insert Type

Non-Isolated TV+FM+SAT1+SAT2 Quadplexer
2in/4out (DAB Compatible)

Insert Colour

Black

EAN13 Barcode

5028690291015

Commodity Code

85367000

Luckins TSI

389453705

ETIM Class

EC000439

Dimensions(Nominal)

Single: Height = 88.0mm Width = 88.0mm Depth = 5.0mm

Fixing Hole Centres

Box Fixing = 60.3mm Grid Fixing = N/A

Minimum Wall Box Depth

35mm

Switched Poles

N/A

Current Rating

n/a

IP Rating

IP2XD

Contact Gap Minimum

N/A

Earth Terminal Capacity 1

5x1mm²

Earth Terminal Capacity 2

4 x 1.5mm²

Earth Terminal Capacity 3

3 x 2.5mm²

Earth Terminal Capacity 4

1 x 4mm² Multi-strand

Earth Terminal Capacity 5

1 x 6mm²

Product Class 1

Must be earthed (ref BS7671 415.2.1)

Ambient Operating Temperature

-5° to +40°C

Recommended Location

Internal Use Only

Maximum Installation Altitude

2000m

Standard/Approval

BS EN 50581:2012, BS EN 60728-4:2008, BS EN 50083-2: 2012/A1:2015

Patents And Trade Marks

Hartland is a Registered Trade Mark No. 2344778

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | W: www.hamilton-litestat.com

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 18/05/2024 E&OE