

Code: 7G291XLEDITB100

Hartland G2 | HARTLAND G2 RANGE | LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmers

Product Image



Wiring



Dimensions

Insert Type	1 gang 100W LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmer
Insert Colour	Antique Brass
EAN13 Barcode	5051164002893
Commodity Code	85365015
Luckins TSI	407518920
ETIM Class	EC000025
Dimensions(Nominal)	Single: Height = 87.4mm Width = 87.4mm Depth = 4.65mm
Weight	157 GR
Fixing Hole Centres	Box Fixing = 60.3mm
Minimum Wall Box Depth	35mm
Switched Poles	Single
Current Rating	0.4A
Voltage	230V AC
Maximum Load	5-100W (10 LED Lamps MAX)
Mains Frequency	50Hz
IP Rating	IP2XD
Terminal Capacity 1	2X1mm²
Terminal Capacity 2	2x1.5mm²
Earth Terminal Capacity 1	5x1mm²
Earth Terminal Capacity 2	4X1.5mm²
Earth Terminal Capacity 3	3X2.5mm²
Earth Terminal Capacity 4	1X4mm² Multi-Strand
Earth Terminal Capacity 5	1X6mm²
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5°C to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN 60669-2-1
Additional Notes	Trailing Edge & Leading Edge Dimmer

# DATASHEET


**Code:** 7G291XLEDITB100

## Hartland G2 | HARTLAND G2 RANGE | LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmers

**Hamilton**<sup>®</sup>  
HARTLAND G2  
1XLEDITB  
LEDITB100 2 Way Dimmer

### Patents And Trade Marks

Hartland G2 is a Registered Trade Mark No  
UK00003388376

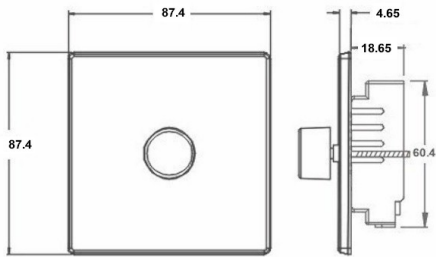

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

**T:** +44 (0)1747 860088

**E:** [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | **W:** [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 25/04/2024 E&OE