DATASHEET

making connections beautifully


Hamilton

Code: 89SS1AB-B Sheer | SHEER RANGE | Power Sockets

Product Image



Wiring



Dimensions

Insert Type	1 gang 13A Double Pole Switched Socket
Insert Colour	Antique Brass/Black
EAN13 Barcode	5017503892013
Commodity Code	85363010
Luckins TSI	386905984
ETIM Class	EC000125
Dimensions(Nominal)	Single: Height = 86.0mm Width = 86.0mm Depth = 1.5mm
Weight	150 GR
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = N/A
Minimum Wall Box Depth	35mm
Switched Poles	Double
Current Rating	13 Amp
Voltage	220/250V AC
Maximum Load	13 Amp
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	4x2.5mm²
Terminal Capacity 2	3x4mm ²
Terminal Capacity 3	2x6mm ² Multi-Strand
Terminal Capacity 4	1x10mm²
Earth Terminal Capacity 1	4x2.5mm²
Earth Terminal Capacity 2	3x4mm ²
Earth Terminal Capacity 3	2x6mm ² Multi-Strand
Earth Terminal Capacity 4	1x10mm²
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS 1363-2

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | **W:** www.hamilton-litestat.com (WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 27/04/2024 E&OE

DATASHEET


Code: 89SS1AB-B Sheer | SHEER RANGE | Power Sockets



T: +44 (0)1747 860088

E: info@hamilton-litestat.com | **W:** www.hamilton-litestat.com (WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 27/04/2024 E&OE

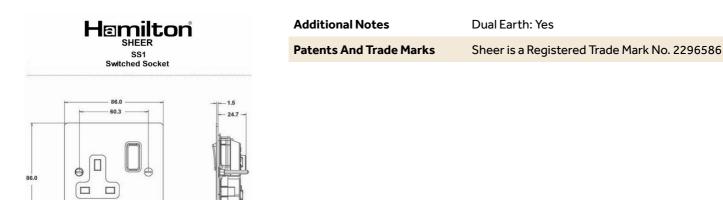



making connections beautifully