

**Code:** 93TCMB

## Cheriton Victorian | CHERITON VICTORIAN RANGE | Telephone and Data Outlets

### Product Image



### Wiring

Pin No.	BT Wiring Schedule Colour Codes: Striped Wires
1	GREEN / White
2	BLUE / White
3	ORANGE / White
4	WHITE / Orange
5	WHITE / Blue
6	WHITE / Green

Main Wire Colour shown in CAPITALS


Incoming Telephone Cable  
On 4 wire systems, Pin 1 and 6  
are not connected.

The maximum REN that can be connected to any one exchange line is 4. Any number of sockets may be connected. All sockets are connected in parallel, ie Pin 1 to Pin 1 ; Pin 2 to Pin 2 ; etc. as shown in the diagram above.

### Dimensions

**Hamilton®**  
CHERITON VICTORIAN

TCM  
Telephone Master Socket

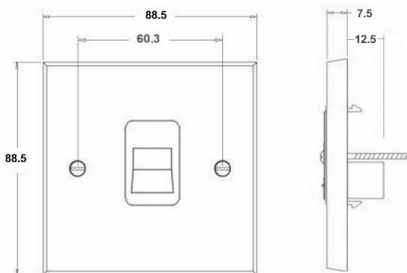

<b>Insert Type</b>	1 gang Telephone Master
<b>Insert Colour</b>	Black
<b>EAN13 Barcode</b>	5017503381647
<b>Commodity Code</b>	85176990
<b>Luckins TSI</b>	387387637
<b>Dimensions(Nominal)</b>	Single: Height = 88.5mm Width = 88.5mm Depth = 7.5mm
<b>Switched Poles</b>	N/A
<b>Current Rating</b>	n/a
<b>IP Rating</b>	IP2XD
<b>Contact Gap Minimum</b>	N/A
<b>Earth Terminal Capacity 1</b>	5x1mm <sup>2</sup>
<b>Earth Terminal Capacity 2</b>	4 x 1.5mm <sup>2</sup>
<b>Earth Terminal Capacity 3</b>	3 x 2.5mm <sup>2</sup>
<b>Earth Terminal Capacity 4</b>	1 x 4mm <sup>2</sup> Multi-strand
<b>Earth Terminal Capacity 5</b>	1 x 6mm <sup>2</sup>
<b>Product Class 1</b>	Must be earthed (ref BS7671 415.2.1)
<b>Ambient Operating Temperature</b>	-5° to +40°C
<b>Recommended Location</b>	Internal Use Only
<b>Maximum Installation Altitude</b>	2000m
<b>Standard/Approval</b>	BS 6312:2:2

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

**T:** +44 (0)1747 860088

**E:** info@hamilton-litestat.com | **W:** www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes. This datasheet was generated on 2/8/2023 11:23:04 AM E&OE