

# DATASHEET

# Hamilton®

making connections beautifully


Code: LGX5258AB-ABB

Linea-Georgian CFX | LINEA-GEORGIAN CFX RANGE | International Power Sockets

## Product Image




## Wiring

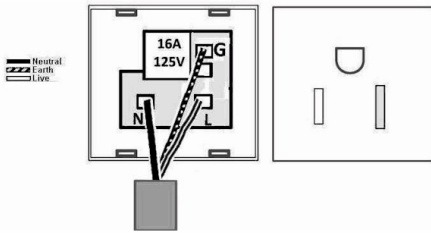

## Dimensions

**Hamilton®**  
LINEA GEORGIAN CFX  
5258  
Unswitched American Socket

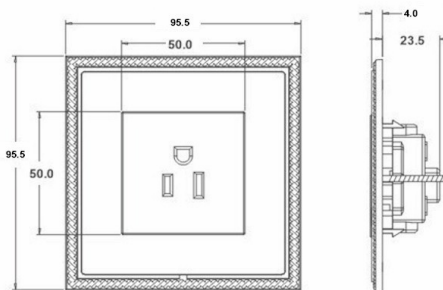

**Insert Type** 1 gang 15A 110V AC American Unswitched Socket

**Insert Colour** Black

**EAN13 Barcode** 5017504043988

**Commodity Code** 85363010

**Luckins TSI** 398658465

**Dimensions(Nominal)** Single: Height = 95.5mm Width = 95.5mm Depth = 4.0mm

**Fixing Hole Centres** Box Fixing = 60.3mm Grid Fixing = CFX Clips

**Switched Poles** None

**Current Rating** 15 Amp

**Voltage** 110V AC

**Maximum Load** 15 Amp

**Mains Frequency** 60Hz

**IP Rating** IP2XD

**Contact Gap Minimum** None

**Terminal Capacity 1** 3x2.5mm<sup>2</sup>

**Terminal Capacity 2** 2x4mm<sup>2</sup>

**Terminal Capacity 3** 1x6mm<sup>2</sup> Multi-strand

**Product Class 1** Face plate must be earthed

**Ambient Operating Temperature** -5° to +40°C

**Recommended Location** Internal Use Only

**Maximum Installation Altitude** 2000m

**Standard/Approval** BS EN ISO 5733 + IEC 60884-1

**Additional Notes** Shuttered :Yes

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | W: www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes. This datasheet was generated on 3/30/2023 11:11:27 PM E&OE