


LPXDTRIDAB-ABB

Linea-Perlina CFX | LINEA-PERLINA CFX RANGE | Digital Television Sockets - Screened Non-Isolated/DAB Compatible


Item Image



Wiring




1. Undo the cable clamp screw.
2. Lift up the cover of the clamp, be careful not to displace the EMC gasket which is located on the cover.
3. Insert the conductor into the terminal slot which is located in the casing of the module.
4. Before closing the cover check to ensure that conductor, screening braid and cable are in the correct position as shown below.
5. Carefully close the cover of the module ensuring that the EMC gasket is not displaced or damaged. Then tighten the cable clamp screw.



Dimensions

Hamilton®
LINEA PERLINA CFX
DTRID
Non-Isolated TV/FM/Satellite1
Triplexer 1in/3out

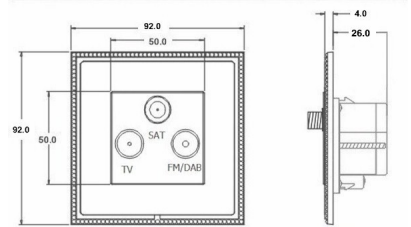

Primary Range	Linea-Perlina CFX	
Insert Type	Non-Isolated TV+FM+SAT Triplexer 1in/3out (DAB Compatible)	
Insert Colour	Black	
EAN13 Barcode	5017504050948	
Commodity Code	85367000	
Luckins TSI	391654181	
Dimensions(Nominal)	Single: Height = 92.0mm Width = 92.0mm Depth = 4.0mm	
Switched Poles	N/A	
Current Rating	n/a	
IP Rating	IP2XD	
Contact Gap Minimum	N/A	
Earth Terminal Capacity 1	5x1mm ²	
Earth Terminal Capacity 2	4 x 1.5mm ²	
Earth Terminal Capacity 3	3 x 2.5mm ²	
Earth Terminal Capacity 4	1 x 4mm ² Multi-strand	
Earth Terminal Capacity 5	1 x 6mm ²	
Product Class 1	Must be earthed (ref BS7671 415.2.1)	
Ambient Operating Temperature	-5° to +40°C	
Recommended Location	Internal Use Only	
Maximum Installation Altitude	2000m	
Standard/Approval	BS EN 50083-2:2012/A1; 2015. BS EN 61169-2:2007. BS EN 61169-24:2009	
All products listed conform to current British or European standard and the product information is correct at the time of going to press.	All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System.	It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.

LPXDTRIDAB-ABB

Linea-Perlina CFX | LINEA-PERLINA CFX RANGE | Digital Television Sockets - Screened Non-Isolated/DAB Compatible

Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.

Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes.

Correct as at 17 January 2021 03:51 PM
E&OE

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088 F: +44 (0)1179 710414

E: info@hamilton-litestat.com www.hamilton-litestat.com

Registered Office 1 Rushmills, Bedford Road, Northampton NN4 7YB

Registered in London No. 941624 VAT Registration No. 222 6607 84



LPXDTRIDAB-ABB - Linea-Perlina CFX Antique Brass Frame/Antique Brass Front Non-Isolated TV+FM+SAT Triplexer 1in/3out (DAB Compatible) Black