

LSXIXLEDITB100AB-AB

Linea-Scala CFX | LINEA-SCALA CFX RANGE | LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmers

Item Image




Wiring



Dimensions

Hamilton®
LINEA SCALA CFX
1XLEDITB
LEDITB100 2 Way Dimmer

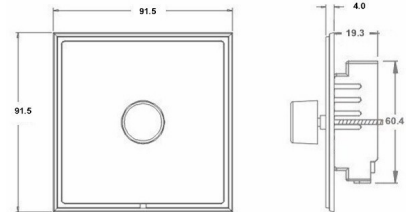

Primary Range	Linea-Scala CFX
Insert Type	1 gang 100W LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmer
Insert Colour	Antique Brass
EAN13 Barcode	5017504085032
Commodity Code	85365015
Luckins TSI	403380738
Dimensions(Nominal)	Single: Height = 91.5mm Width = 91.5mm Depth = 4.0mm
Switched Poles	Single
Current Rating	0.4A
Voltage	230V AC
Maximum Load	5-100W (10 LED Lamps MAX)
Mains Frequency	50Hz
IP Rating	IP2XD
Terminal Capacity 1	2X1mm ²
Terminal Capacity 2	2x1.5mm ²
Earth Terminal Capacity 1	5x1mm ²
Earth Terminal Capacity 2	4X1.5mm ²
Earth Terminal Capacity 3	3X2.5mm ²
Earth Terminal Capacity 4	1X4mm ² Multi-Strand
Earth Terminal Capacity 5	1X6mm ²
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5°C to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN 60669-2-1
Additional Notes	Trailing Edge & Leading Edge Dimmer

LSXIXLEDITB100AB-AB

Linea-Scala CFX | LINEA-SCALA CFX RANGE | LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmers

<p>All products listed conform to current British or European standard and the product information is correct at the time of going to press.</p>	<p>All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System.</p>	<p>It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.</p>
<p>Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.</p>	<p>Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes.</p>	<p>Correct as at 15 June 2021 09:49 PM E&OE</p>
<p>R Hamilton & Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ T: +44 (0)1747 860088 F: +44 (0)1179 710414 E: info@hamilton-litestat.com www.hamilton-litestat.com Registered Office 1 Rushmills, Bedford Road, Northampton NN4 7YB Registered in London No. 941624 VAT Registration No. 222 6607 84</p>		  <p>Listed in  LUCKINS</p>    <p>CERT No. 1981138</p>
<p>LSXIXLEDITB100AB-AB - Linea-Scala CFX Antique Brass Frame/Antique Brass 1g 100W LED 2 Way Push On/Off Rotary Dimmer Antique Brass</p>		