


Code: LTXSPNBG-BGQG  
Linea-Tetra CFX | LINEA-TETRA CFX RANGE | Connection Units


Product Image



Wiring

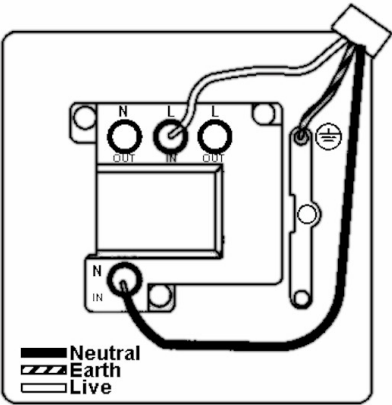

Dimensions

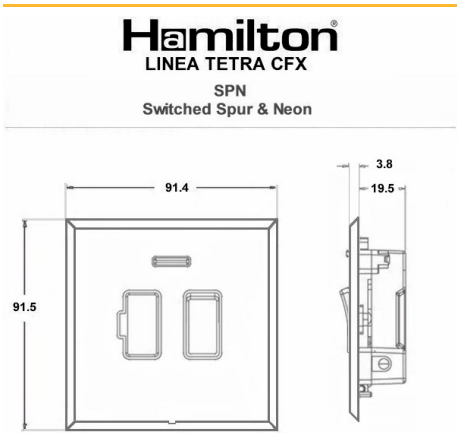

Insert Type	1 gang 13A Double Pole Fused Spur + Neon
Insert Colour	Basalt Gray/Quartz Grey
EAN13 Barcode	5017504092849
Commodity Code	85369010
ETIM Class	EC001590
Dimensions(Nominal)	Single: Height = 91.5mm Width = 91.4mm Depth = 3.8mm
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = CFX Clips
Minimum Wall Box Depth	35mm
Switched Poles	Double
Current Rating	13 Amp
Voltage	220/250V AC
Maximum Load	13 Amp
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	3x2.5mm <sup>2</sup>
Terminal Capacity 2	2x4mm <sup>2</sup> Multi-Strand
Terminal Capacity 3	1x6mm <sup>2</sup>
Earth Terminal Capacity 1	6x1mm <sup>2</sup>
Earth Terminal Capacity 2	5x1.5mm <sup>2</sup>
Earth Terminal Capacity 3	3x2.5mm <sup>2</sup>
Earth Terminal Capacity 4	2x4mm <sup>2</sup> Multi-Strand
Earth Terminal Capacity 5	1x6mm <sup>2</sup>
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS 1363-4
Patents And Trade Marks	Linea is a Registered Trade Mark No 2398665 CFX is a Registered Trade Mark No 2398667 Patent No. GB 2383375B

**Code:** LTXSPNBG-BGQG

**Linea-Tetra CFX | LINEA-TETRA CFX RANGE | Connection Units**