


Code: PCDPNAB-B  
Perception CFX - on Transparent Plates | PERCEPTION CFX RANGE | Double Pole Switches


Product Image



Wiring

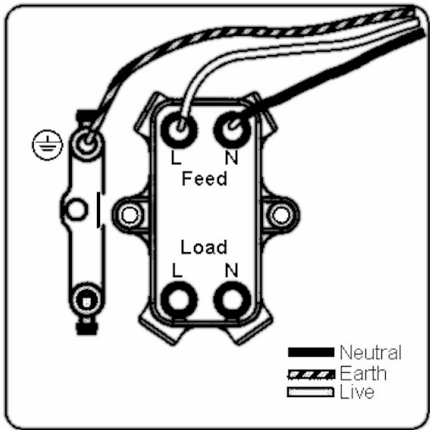

Dimensions

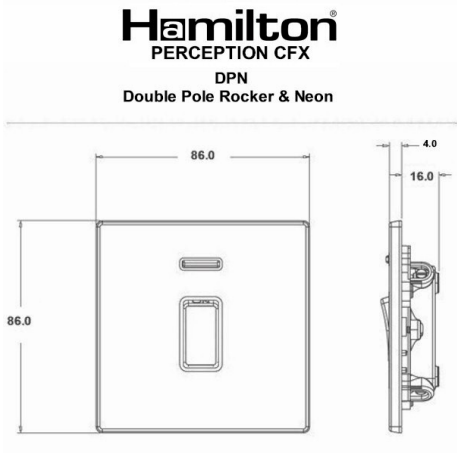

Insert Type	1 gang 20AX Double Pole Rocker + Neon
Insert Colour	Antique Brass/Black
EAN13 Barcode	5017504021429
Commodity Code	85363030
Luckins TSI	394057316
ETIM Class	EC001590
Dimensions(Nominal)	Single: Height = 86.0mm Width = 86.0mm Depth = 4.0mm
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = CFX Push
Minimum Wall Box Depth	25mm
Switched Poles	Double
Current Rating	20AX
Voltage	220/250V AC
Maximum Load	20 Amp inductive
Mains Frequency	50Hz
IP Rating	IP2XD
Contact Gap Minimum	3mm
Terminal Capacity 1	3x2.5mm <sup>2</sup>
Terminal Capacity 2	2x4mm <sup>2</sup> Multi-strand
Terminal Capacity 3	1x6mm <sup>2</sup>
Earth Terminal Capacity 1	6x1mm <sup>2</sup>
Earth Terminal Capacity 2	5x1.5mm <sup>2</sup>
Earth Terminal Capacity 3	3x2.5mm <sup>2</sup>
Earth Terminal Capacity 4	2x4mm <sup>2</sup> Multi-strand
Earth Terminal Capacity 5	1x6mm <sup>2</sup>
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN 60669-1

Code: PCDPNAB-B

Perception CFX - on Transparent Plates | PERCEPTION CFX RANGE | Double Pole Switches

Patents And Trade Marks

Perception is a Registered Trade Mark No 2560269  
CFX is a Registered Trade Mark No 2398667