

DATASHEET

Code: WCATCMB

Woods | WOODS RANGE | Telephone and Data Outlets

Product Image



Wiring


Pin No.	BT Wiring Schedule Colour Codes: Striped Wires
1	GREEN / White
2	BLUE / White
3	ORANGE / White
4	WHITE / Orange
5	WHITE / Blue
6	WHITE / Green
Main Wire Colour shown in CAPITALS	

Incoming Telephone Cable
On 4 wire systems, Pin 1 and 6
are not connected.

The maximum REN that can be connected to any one exchange line is 4. Any number of sockets may be connected. All sockets are connected in parallel, ie Pin 1 to Pin 1 ; Pin 2 to Pin 2 ; etc. as shown in the diagram above.

Dimensions

Hamilton[®]
Woods Chamfered Edge
TCM
Telephone Master Socket

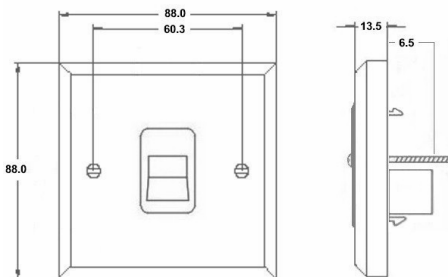

Insert Type

1 gang Telephone Master

Insert Colour

Black

EAN13 Barcode

5017504931643

Commodity Code

85176990

Luckins TSI

391589337

ETIM Class

EC000018

Dimensions(Nominal)

Single: Height = 88.0mm Width = 88.0mm Depth = 13.5mm

Fixing Hole Centres

Box Fixing = 60.3mm Grid Fixing = N/A

Minimum Wall Box Depth

25mm

Switched Poles

N/A

Current Rating

n/a

IP Rating

IP2XD

Contact Gap Minimum

N/A

Earth Terminal Capacity 1

5x1mm²

Earth Terminal Capacity 2

4 x 1.5mm²

Earth Terminal Capacity 3

3 x 2.5mm²

Earth Terminal Capacity 4

1 x 4mm² Multi-strand

Earth Terminal Capacity 5

1 x 6mm²

Product Class 1

Must be earthed (ref BS7671 415.2.1)

Ambient Operating Temperature

-5° to +40°C

Recommended Location

Internal Use Only

Maximum Installation Altitude

2000m

Standard/Approval

BS 6312:2:2

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | **W:** www.hamilton-litestat.com

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 25/04/2024 E&OE